



Accessories

The solutions for all your needs





A complete range of accessories

Sunfab develops, produces and sells piston pumps and motors for operating demanding hydraulic equipment in mobile applications. We also supply a unique range of accessories, which you will find in the following pages.

Sunfab's accessories are a unique range of components designed to meet a bodybuilder's need of basic hydraulic installations.

The vehicle's basic hydraulic installation requires a power take off, pump and hydraulic connections. Not to mention suspension fittings and perhaps adapter flanges with intermediate shaft assembly and the possibility of a distributing gearbox.


Sunfab's vast experience and close co-operation with vehicle bodybuilders forms the basis of our selection of suitable accessories.

The accessories are tested and appraised to maintain the same high quality that characterizes Sunfab pumps and motors.





Content Overview

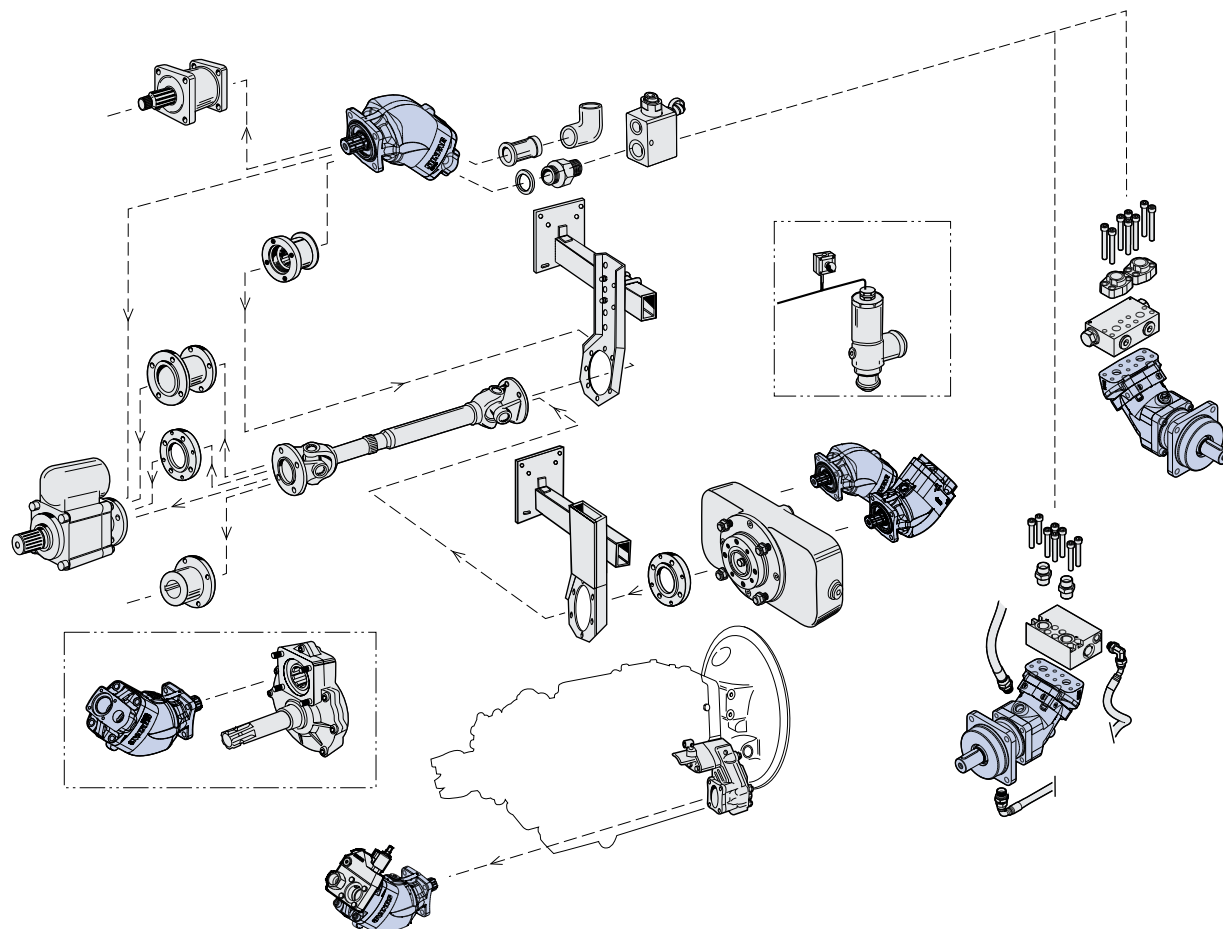

Connections

Suction Connections	1:1
Checkvalves/Pressure connections	1:2
SAE flanges kits	1:3
Check Valve	1:4
Adapter straight, 45°	1:5
Connection rubber 90°	1:6

Gearboxes

Tracpower Gearbox	2:1-2:2
Splitter Gearbox	2:3
Splitter Box	2:4

Suspensions

DIN 5462 (ZF)	3:1
SZ 118/154	3:2
Drive Shafts	3:3
Adapter flange - splitter gearbox	3:4
Adapter flanges	3:5-3:9

Splined drive flanges	3:10
Neutral Drive flanges	3:11
Drive flanges	3:12
Splined drive flanges SAE	3:13-3:14
Splined drive flanges 6 - SP/1 3/8"	3:15

Adapters

Drive-Flange & adapter for DIN power take off	4:1
Special adapter SCANIA	4:2
Distance Adapter Kit	4:3
Special adapter 6 - SP/1 3/8"	4:4
Adapter SAE	4:5-4:6
Adapter Uni - DIN	4:7
In / disconnectable adapter	4:8

Valves Pump

By-Pass Valve	5:1
Pressure relief valve	5:2
Directional valve 3/2	5:3

High Pressure Filter LS	5:4
Shuttle Valve	5:5

Valves Motor

Anti-Cavitation valve	6:1
Flushing valve	6:2

Injector

	7:1
--	-----

Speed Sensor



	8:1
--	-----



Various

Gaskets	10:1
Stud kit	10:2
Diode Gate	10:3



Suction Connections Sauganschlüsse Suganslutningar

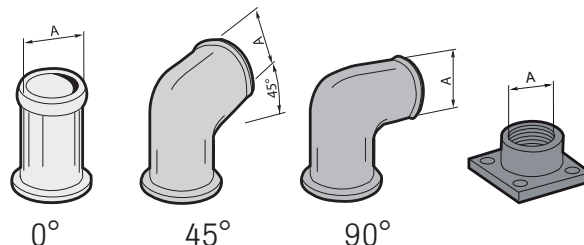

	A		max.				
	mm	inch	l/min	0°	45°	90°	
SAP 012-064 SCP 012-064 SAPT 090 	32	1 1/4"	50	18245	—	—	—
	38	1 1/2"	65	18048	20100	18400	—
	42	1 5/8"	85	—	20136	—	—
	45	1 3/4"	110	—	20423	—	—
	50	2"	120	18047	20101	18401	—
	64	2 1/2"	165	—	20139	—	—
		G 1"	50	—	—	—	50403
SAP 084-108 SCP 084-108 SAPT 130 SCPD 56/26, 76/76 SLPD 20/20-64/32 SVH 062-130 	38	1 1/2"	65	18049	—	18402	—
	42	1 5/8"	85	—	20137	—	—
	45	1 3/4"	110	—	20424	—	—
	50	2"	120	17890	20102	18403	—
	64	2 1/2"	165	18603	20103	18394	—
	75	3"	260	18366	20274	—	—
		G 1 1/4"	80	—	—	—	50404

Given flows valid for mineral oil (10-1500 cSt) and maximum of 2 meter long suction line.

Die angegebenen Volumenströme beziehen sich auf Mineralöle (10-1500 cSt) und einer max. 2 Meter langen Saugleitung.




Angivna flöden gäller för mineralolja (10-1500 cSt) och max 2 meter lång sugledning.



Checkvalves Pressure connections

Rückschlagventilen
Druckanschlüsse

Backventiler
Tryckanslutningar

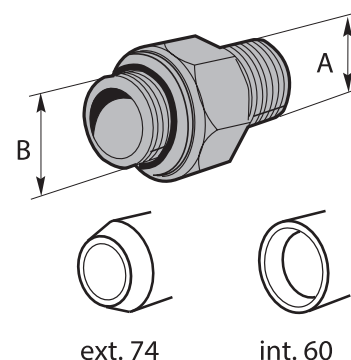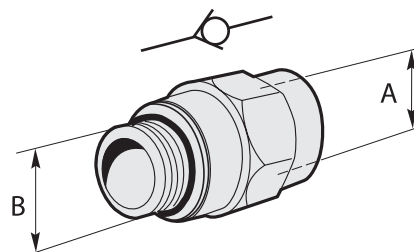




	max. l/min	A		B			
			Taper Kegel Kona		Taper Kegel Kona		
SAP 012-064	90	G $\frac{3}{4}$ "	-	G $\frac{3}{4}$ "	int. 60°		50296
SCP 012-064	160	G $\frac{3}{4}$ "	int. 60°	G1"	int. 60°		50297
SAPT 090							
SCPD 56/26, 76/76	90	G $\frac{3}{4}$ "	-	JIC 1 $\frac{1}{16}$ "	ext. 74°		50298
SLPD							
SVH 062	90	G $\frac{3}{4}$ "	-	G $\frac{3}{4}$ "		91712	
SAP 084-108 SCP 084-108 SAPT 130 SVH 092-130	160	G1"	-	G1"	int. 60°		50299
	160	G1"	-	JIC 1 $\frac{1}{16}$ "	ext. 74°		50300
	160	G1"	-	JIC 1 $\frac{5}{16}$ "	ext. 74°		50301
	90	G1"	-	G $\frac{3}{4}$ "	int. 60°		50302
	160	G1"	-	G1"		91713	



SAE flanges kit (includes 1 flange, 1 o-ring and 4 screws)



SAE Flanschen kit (enthält 1 flansch, 1 o-ring und 4 schrauben)

SAE flänssats (inkluderar 1 fläns, 1 o-ring och 4 skruvar)

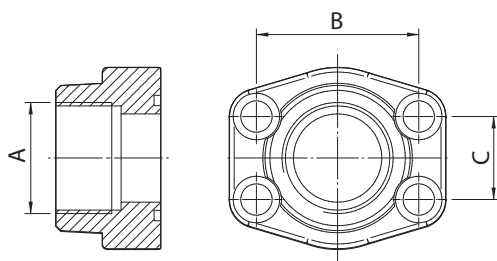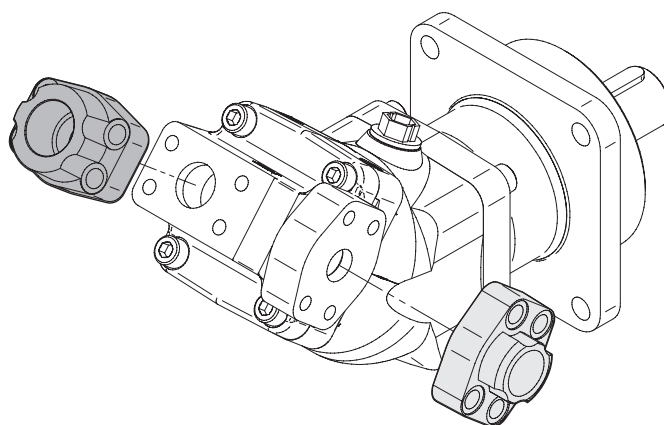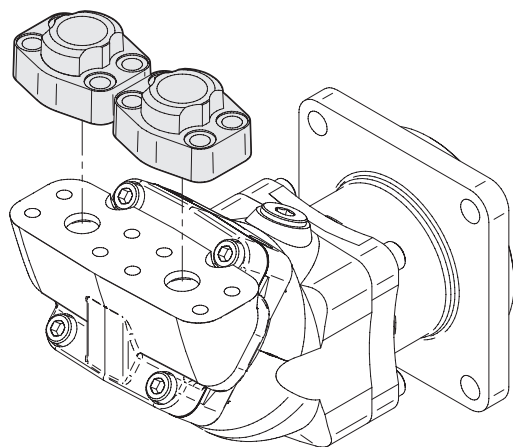

				SCM Motor 				SCP ISO Pump 	
				ISO/M	ISO/UN	SAE/UN	SAE/M	SCP ISO	
CM ³ /rev	A	B	C	6000 Psi	6000 Psi	6000 Psi	6000 Psi	3000 Psi	6000 Psi
25 - 34	G 1/2"	40,49	18,24	50644			50644		50644
25 - 34	G 3/4"	47,63	22,23					50938	
40 - 64	G 3/4"	50,80	23,80	50512	50432	50432	50512		50512
40 - 64	G 1"	52,37	26,19					50435	
84 - 130	G 1"	57,15	27,76	50513	50431	50431	50513		50431
84 - 90	G 1 1/4"	58,72	30,18					50645	
84 - 130	G 1 1/4"	66,68	31,75	50939			50939		50939
108 - 130	G 1 1/2"	69,85	35,71					50940	

Check valve / counter pressure valve
Rückschlag ventil/ gegendruckventil
Backventil / mottrycksventil



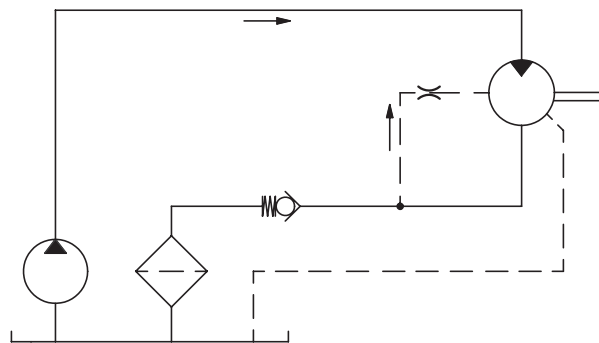
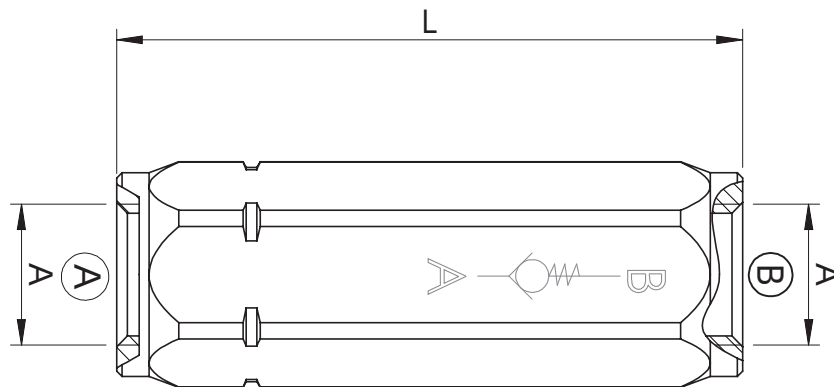


			Cracking pressure Öffnungsdruck Öppningstryck	l/min	L	Max pressure Max druck Max tryck	
SCM	3/4"	92368	0,5	150	83 mm	420 bar	Equipment Ausrüstung Utrustning
		92370	4				
		92372	8				
	1"	92369	0,5	200	106 mm	420 bar	
		92371	4				
		92373	8				

3446GB-DE-SE1709 Rev 1.0




Adapter straight, 45°
 Adapter gerade, 45°
 Adapter rak, 45°

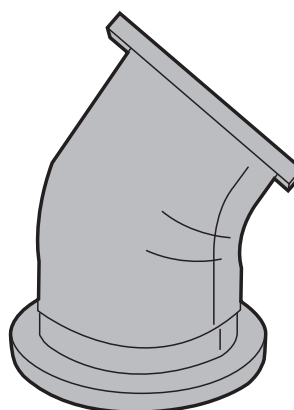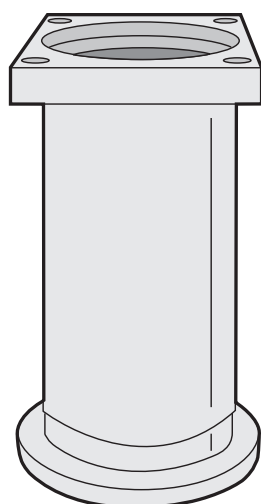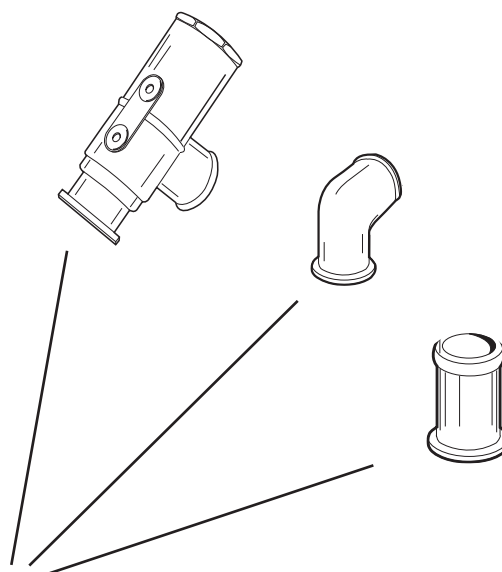

SAP 084-108, SAPT 130 SCP 084-130 SCPD 56/26, 76/76 SLPD, SVH	50944	18273	PUMP 4
--	-------	-------	--------

3406GB-DE-SE1506 Rev 1.1

Connection rubber 90°
Anschlüsse Gummi 90°
Anslutning gummi 90°

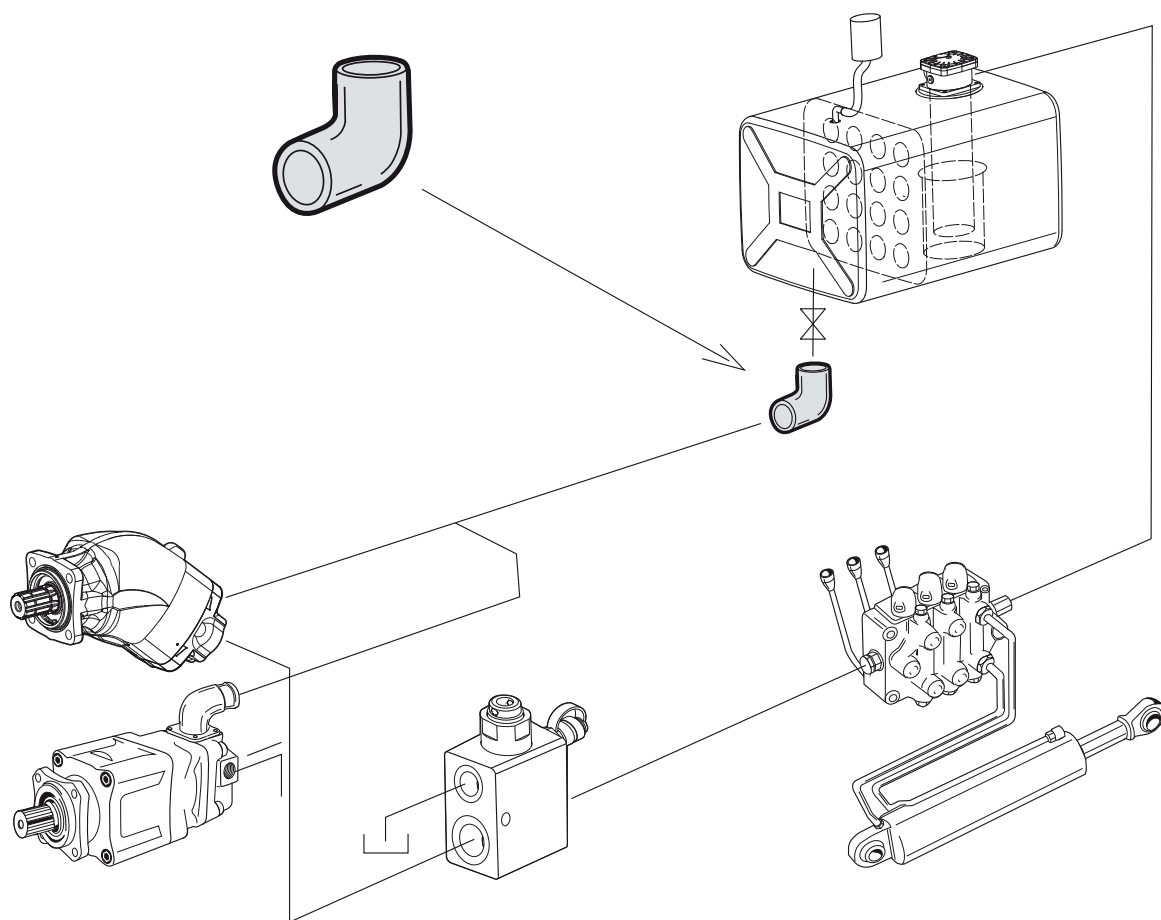

All pumps Alle Pumpen Alla pumpar	Ø 38 mm	65 l/min	17732	Equipment Ausrüstung Utrustning
	Ø 50 mm	120 l/min	17767	
	Ø 64 mm	160 l/min	18775	
	Ø 75 mm	260 l/min	18778	




TRACPOWER Gearbox


TRACPOWER Zapfwellengetriebe

TRACPOWER Tappväxel

DIN 5462

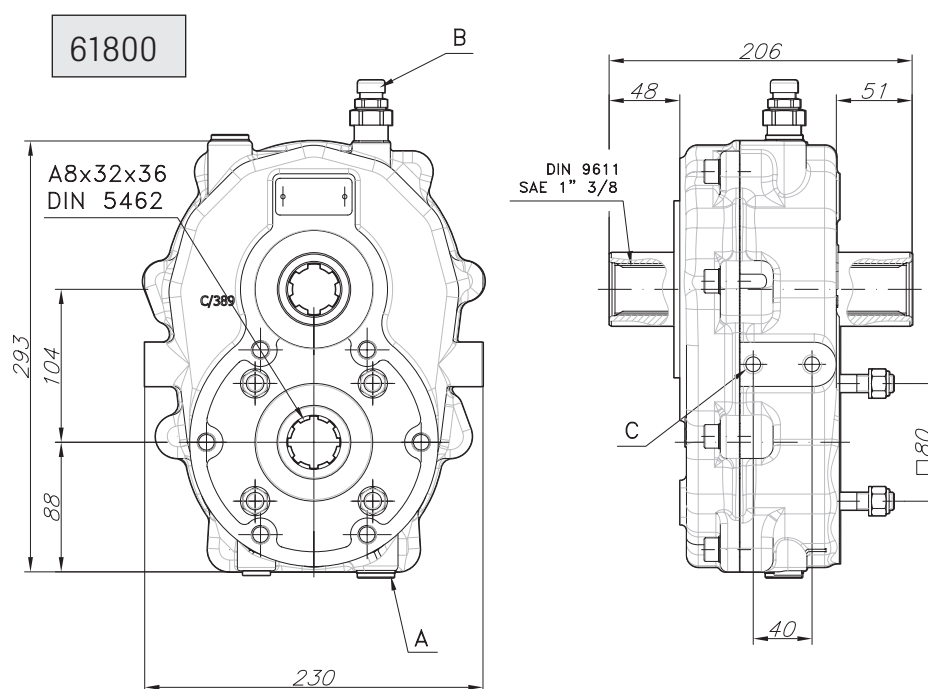

17814



Ratio
Übersetzung
Utväxling

Max. torque Nm / pump
Max. Drehmoment Nm / Pumpe
Max moment Nm / pump

All Alle DIN 5462 (ZF) Alla	1:2.5	61800	17814	320	1 3/8" SAE J1170

For detailed information,
see separate Datasheet on
our [website](#).

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).

3408GB-DE-SE1506 Rev 1.1




TRACPOWER Gearbox

TRACPOWER Zapfwellengetriebe

TRACPOWER Tappväxel

DIN 5462

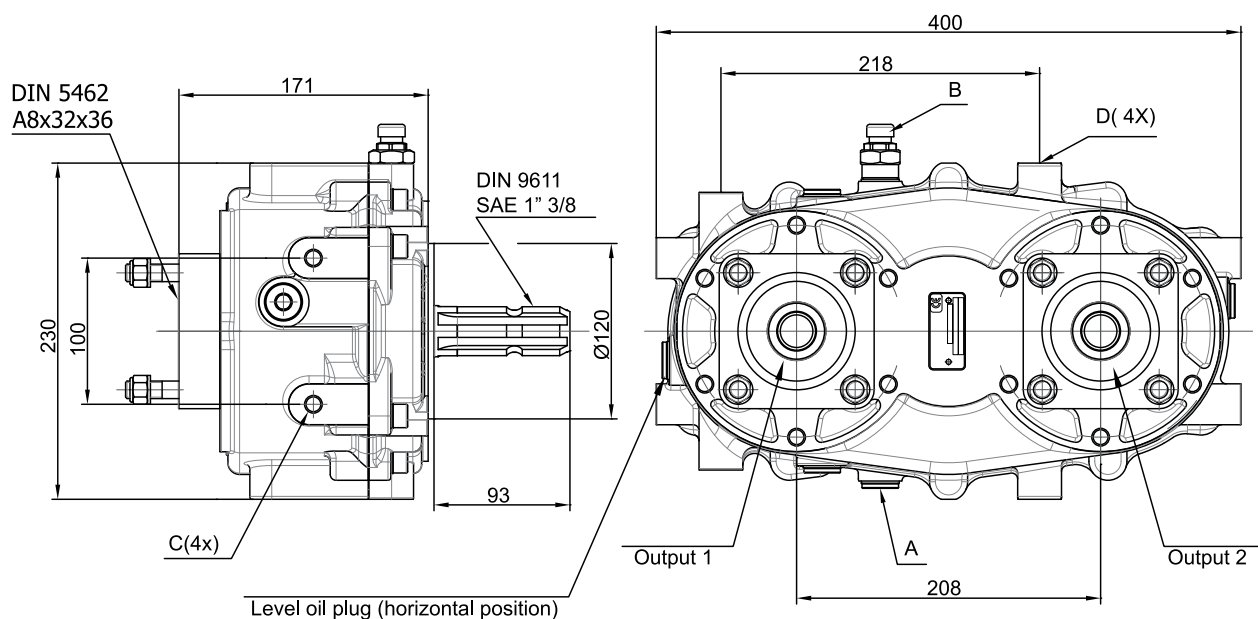

	Ratio Übersetzung Utväxling		Max. torque Nm Max. Drehmoment Nm Max moment Nm	
All Alle DIN 5462 (ZF) Alla	1:2.5	61820	320	13/8" SAEJ1170

For detailed information,
see separate Datasheet on
our [website](#).

For additional configurations,
contact Sunfab.

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

Für weitere Konfigurationen
kontaktieren Sie bitte Sunfab


För detaljerad information se separat
datablad på vår [hemsida](#).

För ytterligare konfigurationer,
kontakta Sunfab.



Splitter gearbox
Verteilergetriebe
Fördelningsväxel

SZ 118
SZ 154

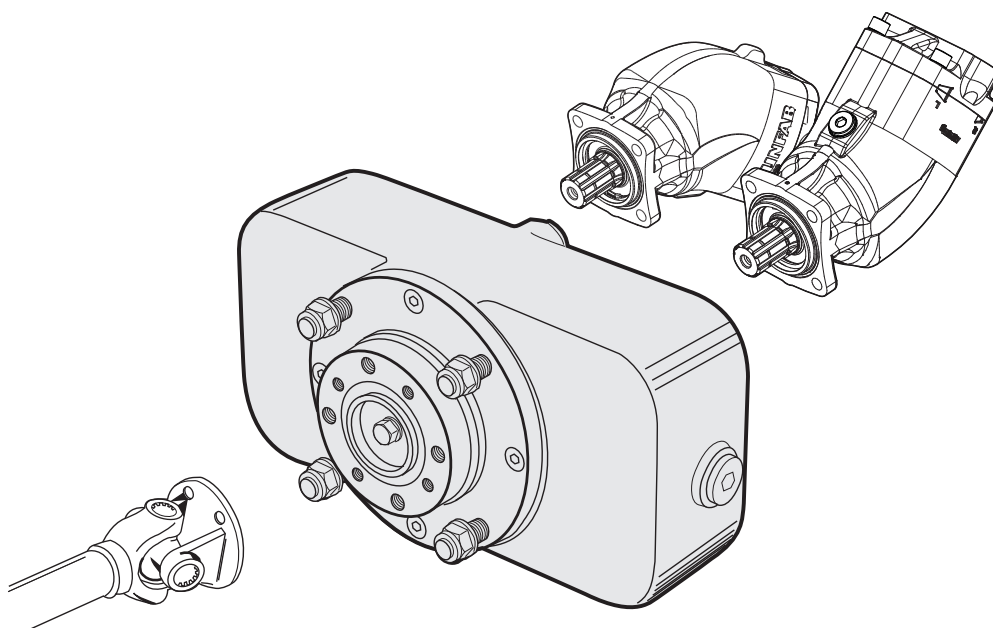

	Ratio Übersetzung Utväxling	Type		
Spicer 1300 (B2)	1:1.18	SZ 118	61080	
 Pump 12	1:1.54	SZ 154	61079	
				All Alle DIN 5462 (ZF) Alla

For detailed information,
see separate Datasheet on
our [website](#).

An adapter flange will be needed for the
Spicer 1400 and the DIN 6-bolt drive
shaft.  Pump 12

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#)

Bei Zwischenwelle Spicer 1400 und
DIN-Ausführung mit 6 Bohrungen
ist ein Adapterflansch erforderlich.
 Pump 12

För detaljerad information se separat
datablad på vår [hemsida](#).


För mellanaxel Spicer 1400 och DIN
6-håls krävs adapterfläns.  Pump 12



Splitter Box

Verteilergetriebe

Växellåda

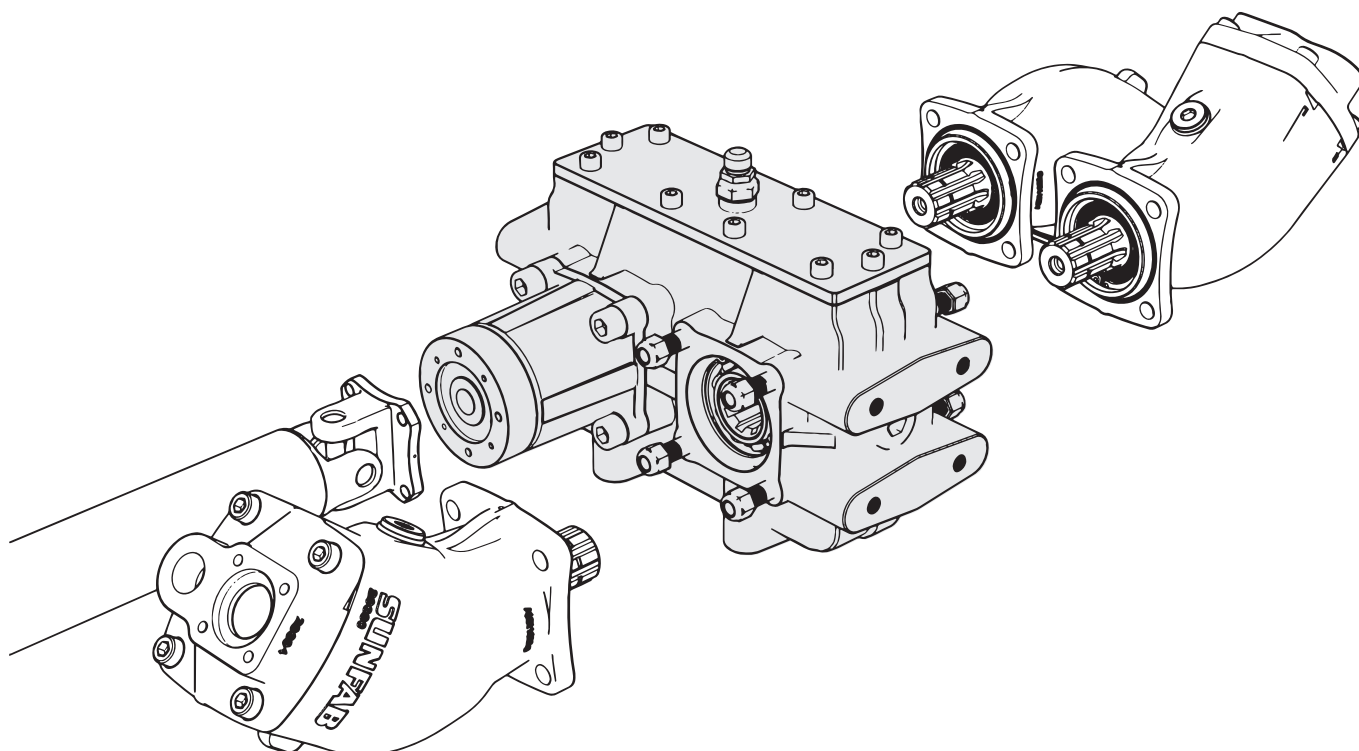

	Ratio Übersetzung Utväxling	Type		
Spicer 1400 (B3) ☞ Pump 12	1:21	SZ 121	61025 	All Alle DIN 5462 (ZF) Alla

For detailed information,
see separate Datasheet on
our [website](#).

An adapter flange will be needed for the
Spicer 1400 and the DIN 6-bolt drive
shaft. ☞ Pump 12

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#)

Bei Zwischenwelle Spicer 1400 und
DIN-Ausführung mit 6 Bohrungen
ist ein Adapterflansch erforderlich.
☞ Pump 12


För detaljerad information se separat
datablad på vår [hemsida](#).

För mellanaxel Spicer 1400 och DIN
6-håls krävs adapterfläns. ☞ Pump 12



Frame attachments & pump suspensions
Rahmenbefestigungen & Pumpenhalterungen
Ramfästen & pumpupphängningar


DIN 5462 (ZF)

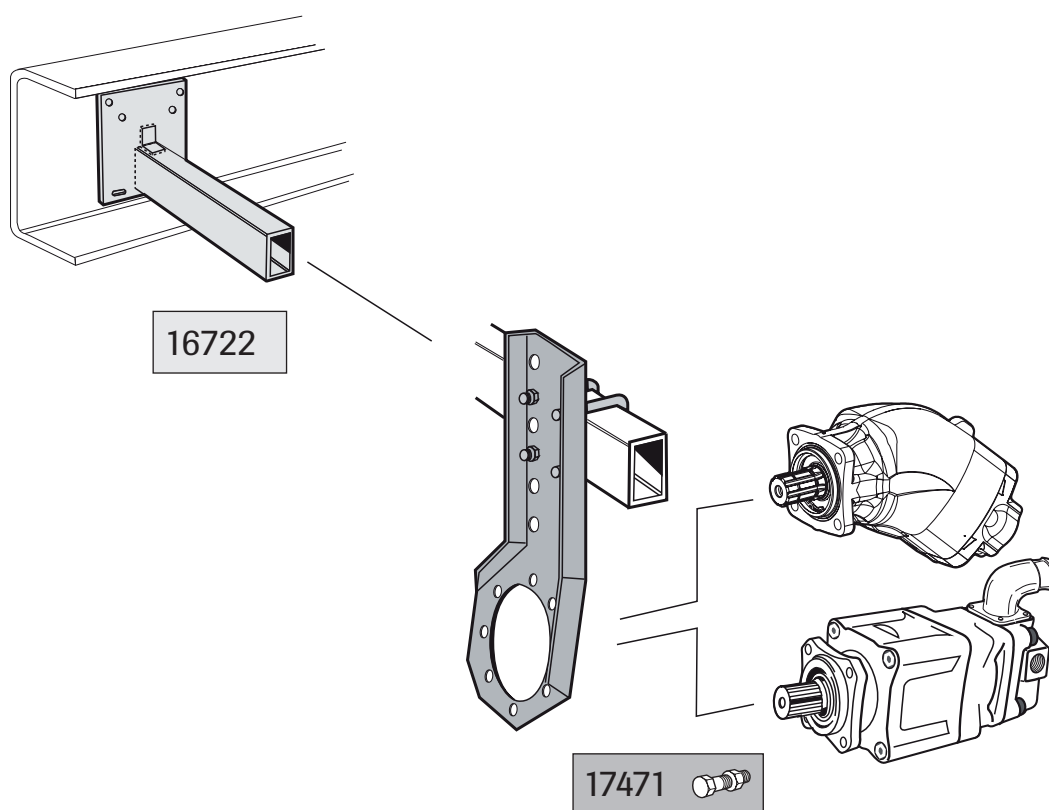




Frame attachments & Gearbox suspensions
Rahmenbefestigungen & Getriebehalterungen
Ramfästen & växelupphängningar

SZ 118/154

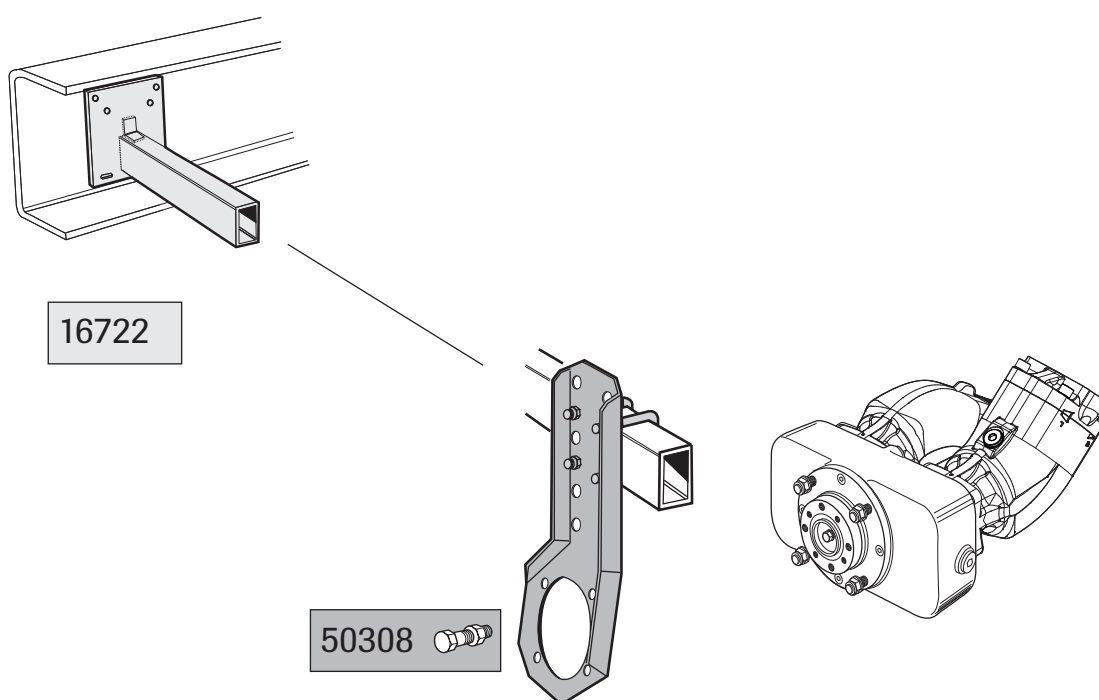




Drive Shafts Gelenkwellen Mellanaxlar

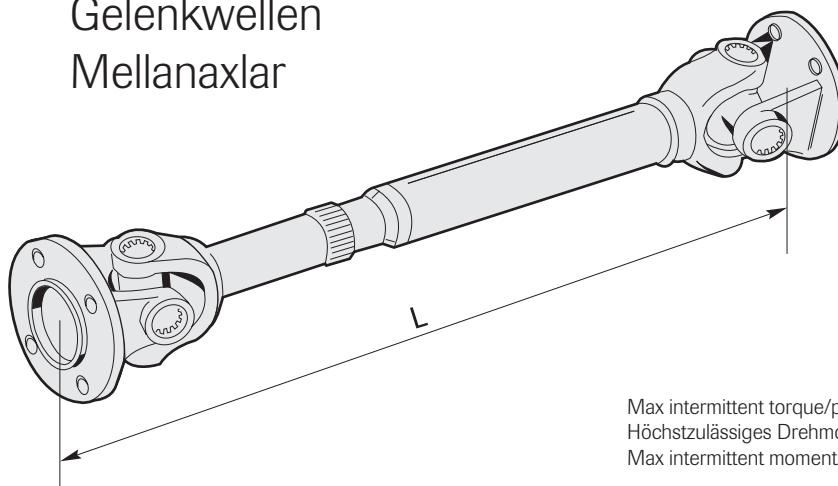

Max intermittent torque/power
Höchstzulässiges Drehmoment/Leistung
Max intermittent moment/effekt

		700 rpm		1500 rpm		
		Nm	kW	Nm	kW	
Spicer 1100 (B1)		16665	250	18	210	32
Spicer 1300 (B2)		92143	500	36	400	60
Spicer 1400 (B3)		16667	900	65	700	105
DIN 4-bolt DIN 4-håls	DIN 4-Loch ☞ Pump16	16665+11915	250	18	210	32

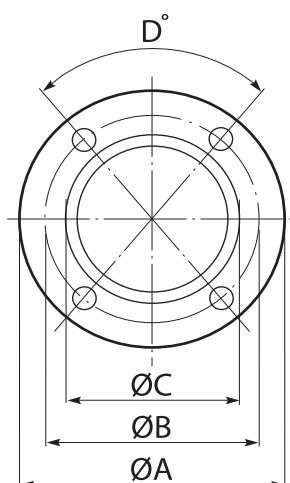

	A mm	B mm	C mm	D	L* mm
16665	88	69.9	57.2	80°	1500
92143	97	79.4	60.3	80°	1500
16667	115	95.3	69.9	80°	1500

* Max. length. Customer adjusts length to suit its particular installation. The welded universal joint is delivered in the same parcel as the drive shaft.

For detailed information, see separate installation guide on our [website](#).

* Größte Länge, die bedarfsweise zu kürzen ist. Schweißteil wird lose mitgeliefert.

Ausführliche Beschreibung: Siehe einbauleitung auf unserer [Website](#).


* Max längd. Aktuell montage-längd anpassas av kund. Svetsknuten levereras lös.

För detaljerad information se separat installationsanvisning på vår [hemsida](#).




Adapter flange for splitter gearbox
 Adapterflansche für Verteilergetriebe
 Adapterfläns för fördelningsväxel

SZ

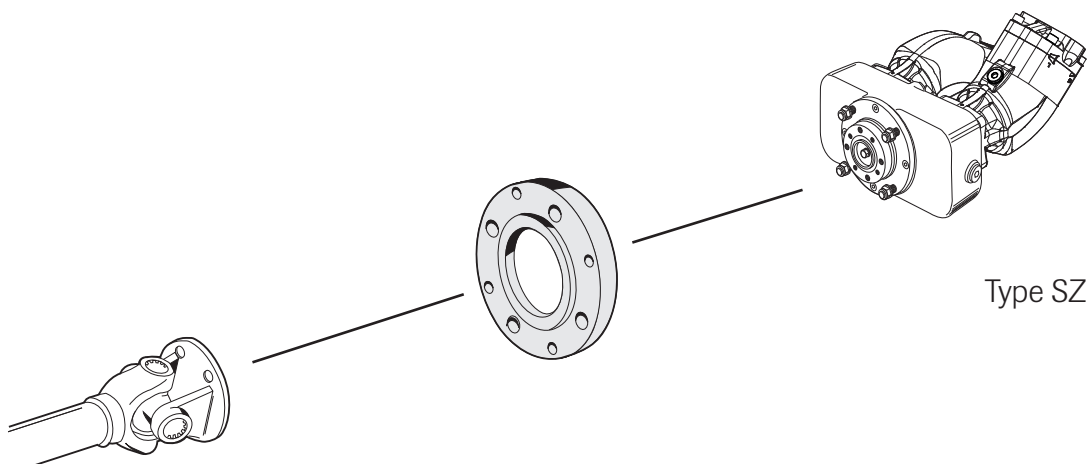


Type SZ

Spicer 1400 (B3)	17876 	SZ 118, 154 (B2)  Pump 9
DIN 6-bolt Ø 100 DIN 6-Loch DIN 6-håls	17638 	

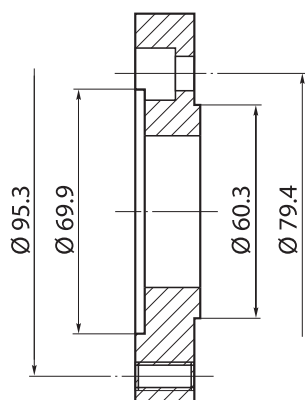


17876

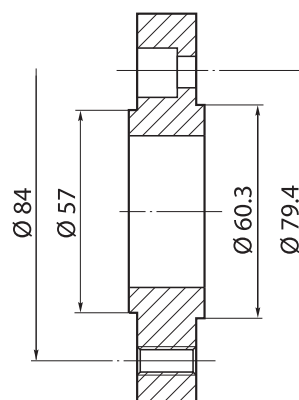


17638

Adapter flanges
Adapterflansche
Adapterflänsar

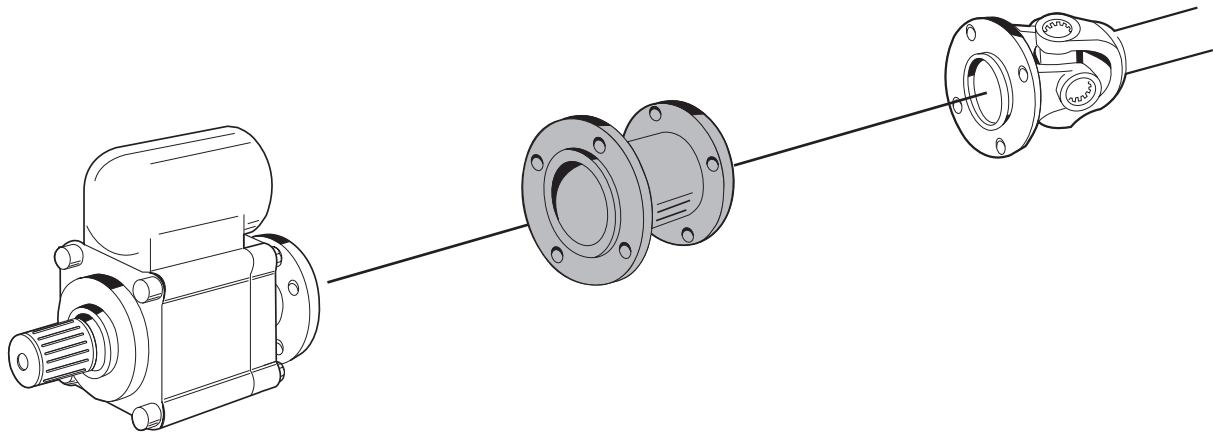


Spicer 1100 (B1)	14064 	Spicer 1300 (B2)  Pump 12
------------------	---	--

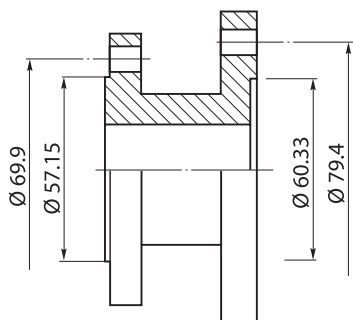


14064

3415GB-DE-SE1509 Rev 1.1


Adapter flanges Adapterflansche Adapterflänsar

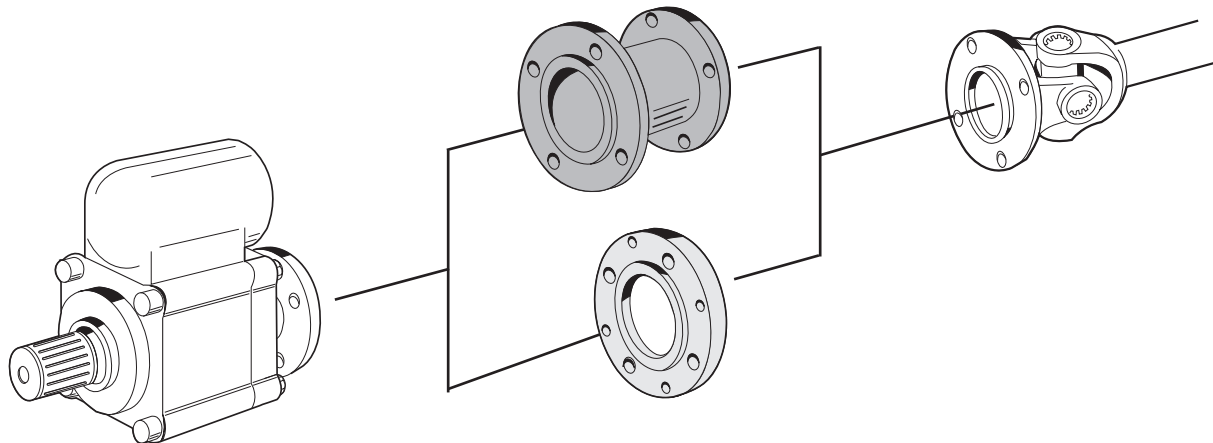


Spicer 1300 (B2)	17355		Spicer 1100 (B1)	Pump 12 
	17876		Spicer 1400 (B3)	
	18236		DIN 100, 6-bolt DIN 100, 6-Loch DIN 100, 6-håls	
	13631		DIN 120, 8-bolt DIN 120, 8-Loch DIN 120, 8-håls	




17355



17876






18236

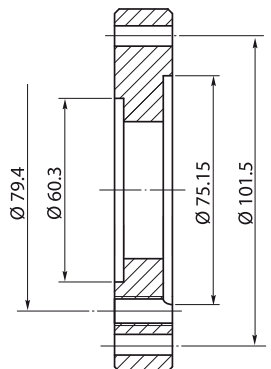


13631


Adapter flanges
Adapterflansche
Adapterflänsar

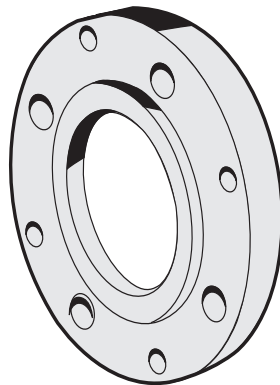


Spicer 1400 (B3)	13740 	Spicer 1300 (B2)	 Pump 12
	11656 	Spicer 1100 (B1)	
DIN 4-bolt Ø90 DIN 4/6-Loch DIN 4/6-håls	11915 		



13740

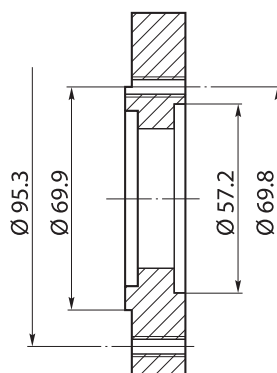


11656

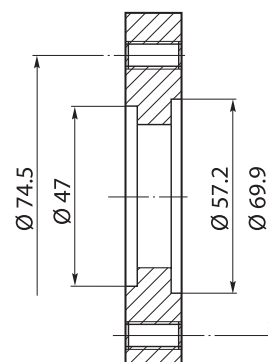


11915


Adapter flanges
Adapterflansche
Adapterflänsar

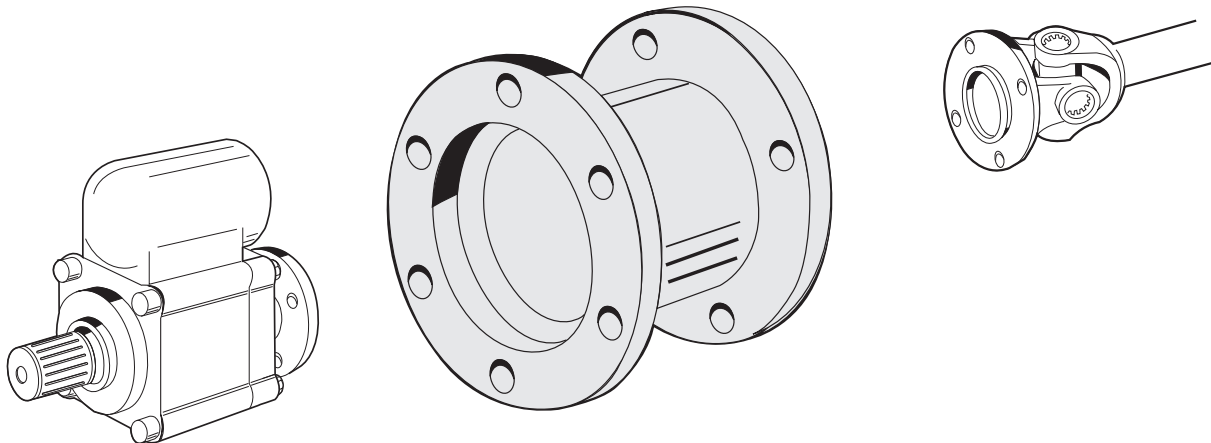

6 bolt DIN 6 Loch 6 håls Ø 75	14063	Spicer 1100 (B1)	Pump 12
	14062	Spicer 1300 (B2)	

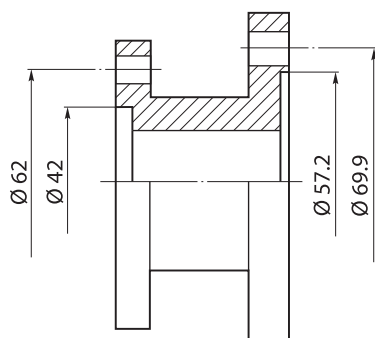


14063

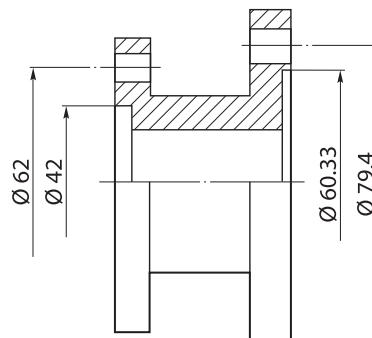


14062




Adapter flanges Adapterflansche Adapterflänsar

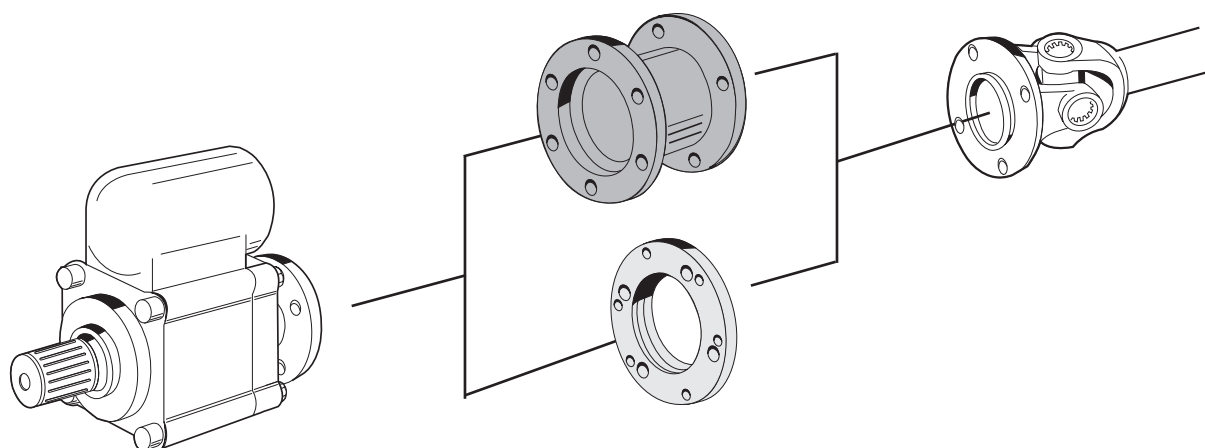


6 bolt DIN 6 Loch Ø 100 6 håls	18287		Spicer 1100 (B1)	Pump 12 
	18236		Spicer 1300 (B2)	
	18020		Spicer 1400 (B3)	



18287




18236

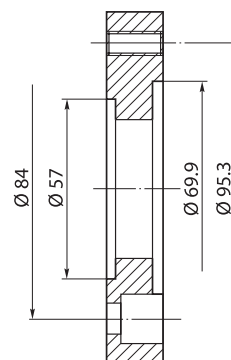


18020



Splined drive flanges Keilwellen-Mitnehmerflansche Medbringare med splines

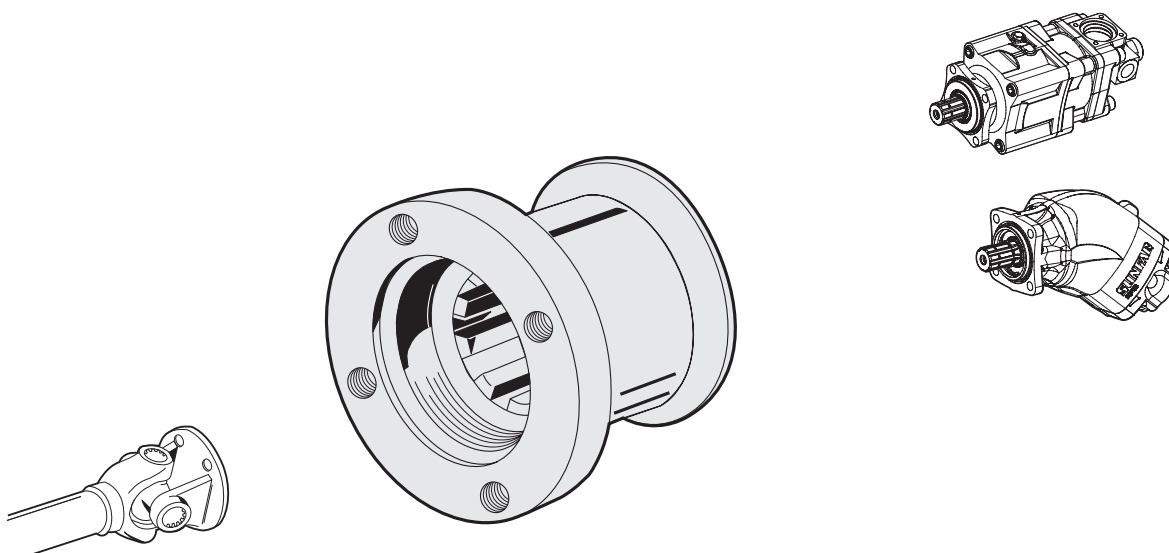

Pump 12	Spicer 1100 (B1)	16643		All pumps Alle Pumpen Alla pumpar
	Spicer 1300 (B2)	17335		
	Spicer 1400 (B3)	18150		
DIN 4-bolt DIN 4-Loch DIN 4-håls		17010		

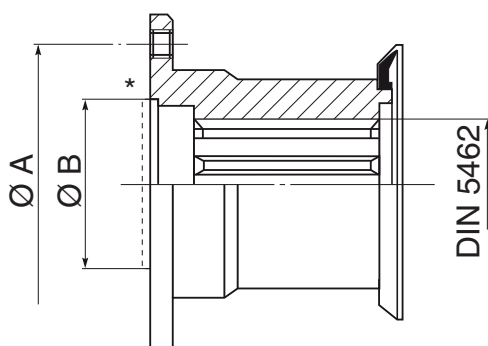

	A mm	B mm
16643	69.9	57.2
17335	79.4	60.3
18150	95.3	69.9
17010	74.5	47.0 *

- * External guide
- * Äußere Führung
- * Utvändig styrning

Note: The drive flanges are supplied complete with bolts, washers and dust excluder.

Bemerkung: Schrauben, Scheiben und Staubschutz sind im Lieferumfang enthalten.


Anm: Medbringarna levereras komplett med skruvar, brickor och dammskydd.




Neutral Drive Flanges

Neutrale Mitnehmerflansche

Neutrala medbringarflänsar

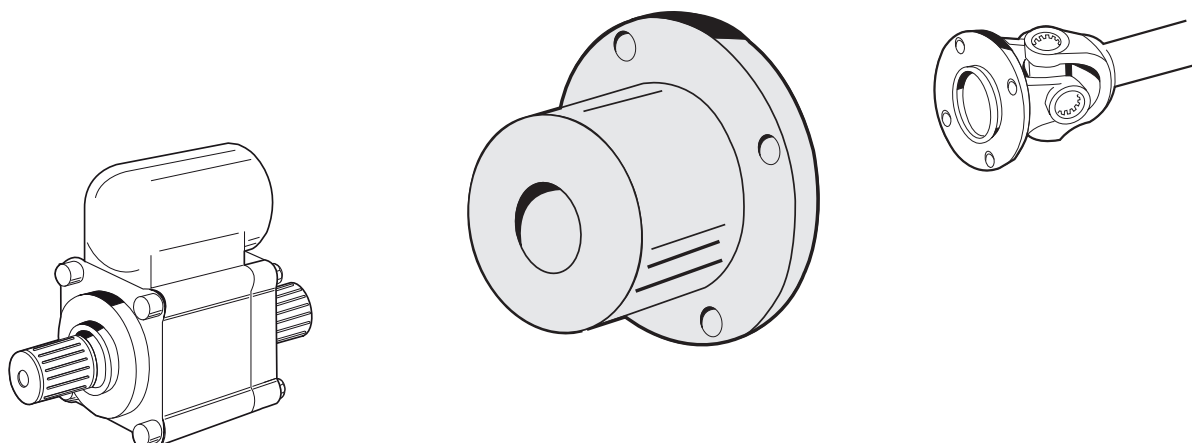

Shaft Welle Axel	10325 	Spicer 1100 (B1)	Pump 12 
	15362 	Spicer 1300 (B2)	
	16670 	Spicer 1400 (B3)	
	17764 	DIN 4-bolt DIN 4-Loch DIN 4-håls	
	17765 	DIN 6-bolt Ø100 DIN 6-Loch DIN 6-håls	

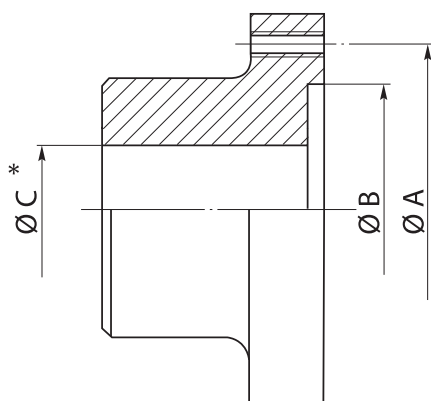

	A mm	B mm	C mm
10325	69.9	57.2	18*
15362	79.4	60.3	20*
16670	95.3	69.9	20*
17764	74.5	47.0	18*
17765	84.0	57.0	20*


*To be finished

*Auf Fertigmaß bearbeiten


*Skall slutbearbetas

3421GB-DE-SE1506 Rev 1.0

Drive flanges
Mitnehmerflansche
Medbringarflänsar
1 1/4"

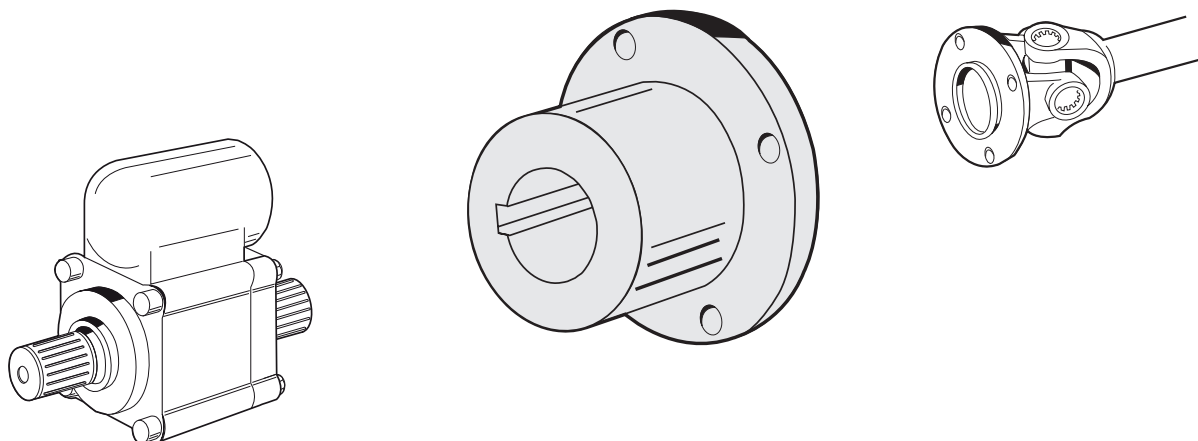

SAE standard SAE-Norm	16541 	Spicer 1100 (B1)	Pump 12 
	16639 	Spicer 1300 (B2)	

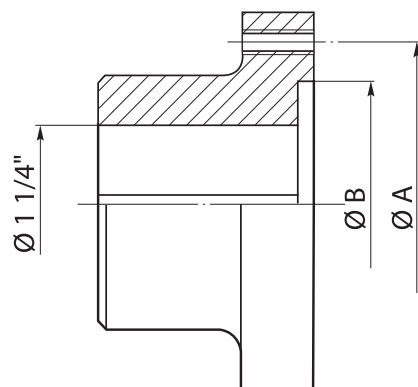


	A mm	B mm
16541	69.9	57.2
16639	79.4	60.3



Splined drive flanges
Keilwellen-Mitnehmerflansche
Medbringare med splines

SAE-B

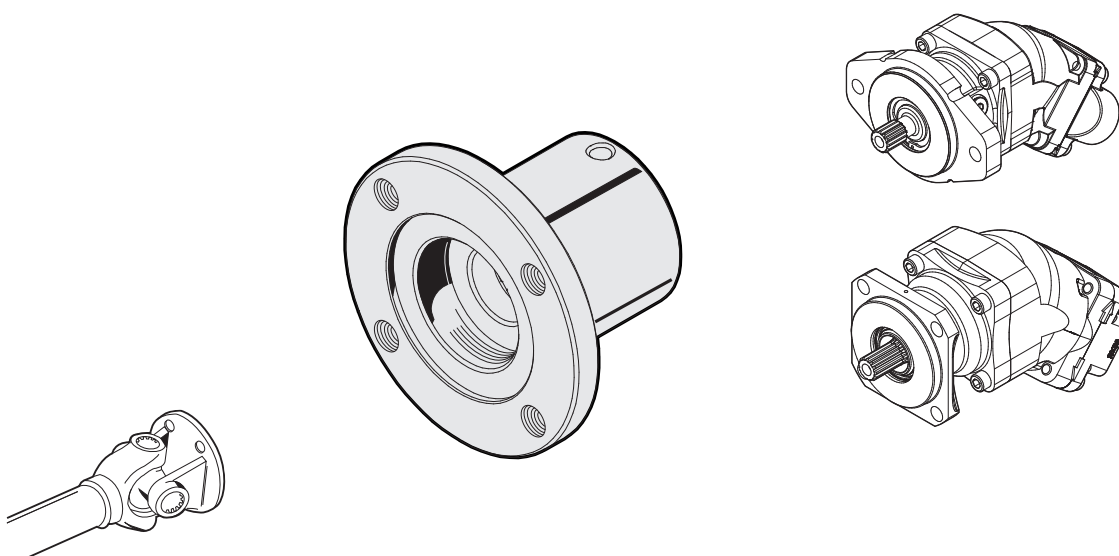


Pump 12

Spicer 1300 (B2)

61154 

SAE-B 13T 16/32

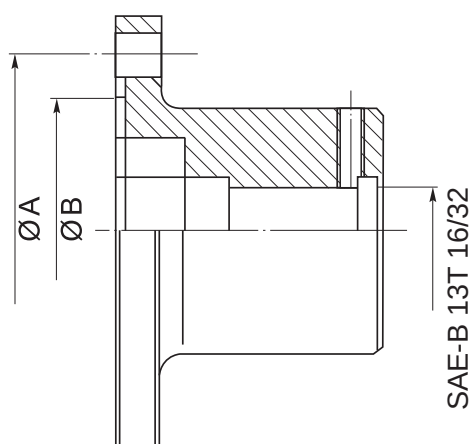


	A mm	B mm
61154	79.4	60.3




Splined drive flanges
Keilwellen-Mitnehmerflansche
Medbringare med splines

SAE-C

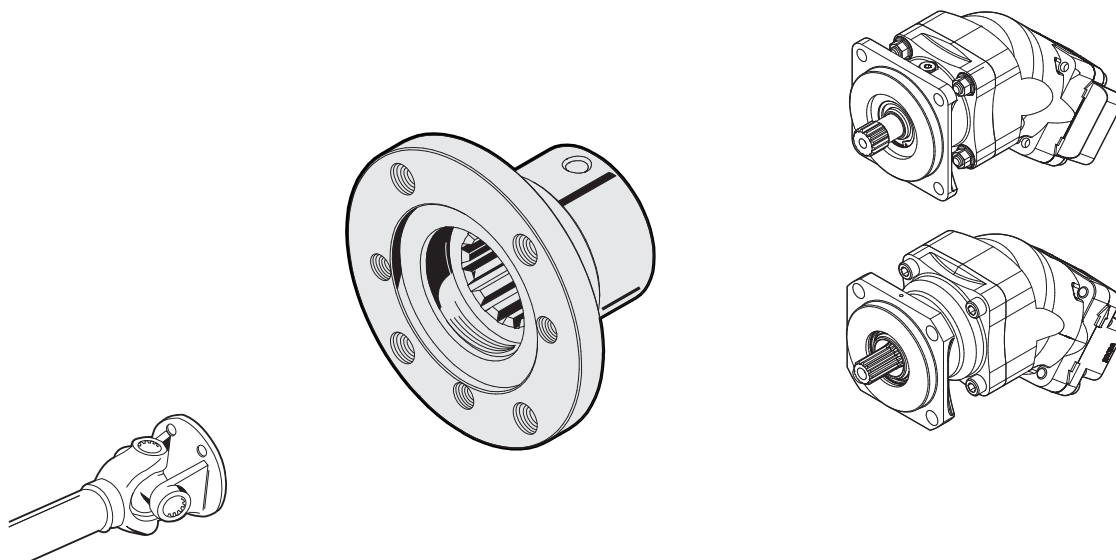

Pump 12	Spicer 1100 (B1)	61054	SAE-C 14T 12/24
	Spicer 1300 (B2)	61054	


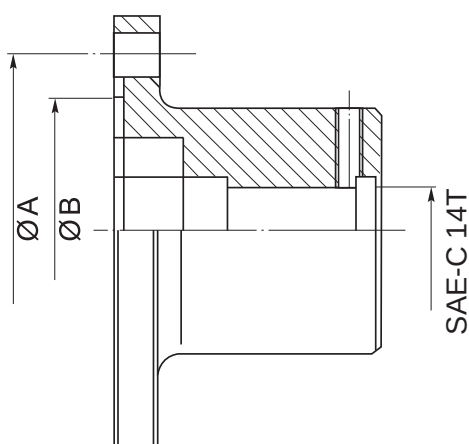


	A mm	B mm
61054 (1100)	69.9	57.2
61054 (1300)	79.4	60.3



Splined drive flanges
Keilwellen-Mitnehmerflansche
Medbringare med splines


6 - SP/1 3/8"

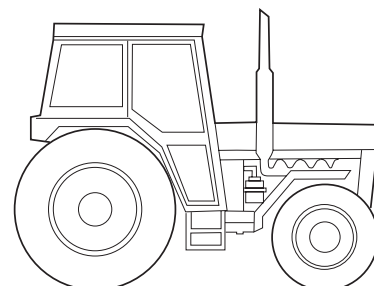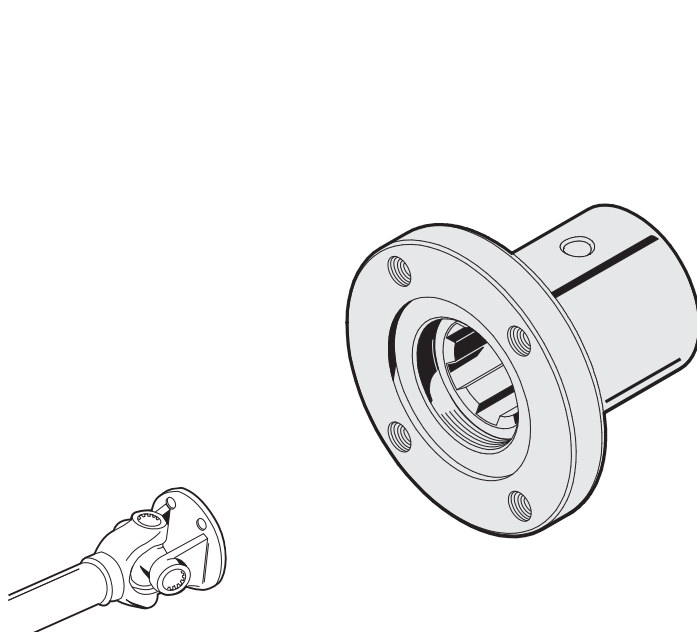

Pump 12 SAE 1300

61050


1300-6 - SP/1 3/8"

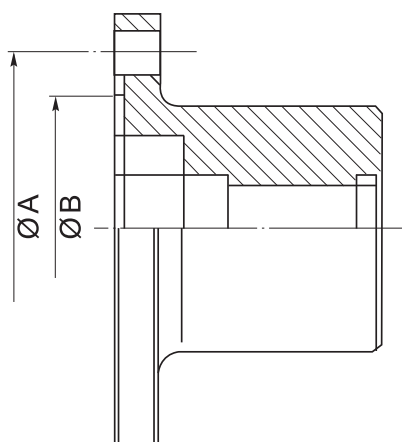


	A mm	B mm
61050	79.35	60.35



Drive-flange & adapter for DIN power take off Antriebsflansch & Adapter für DIN-Nebenantriebe Drivfläns & adapter för DIN kraftuttag

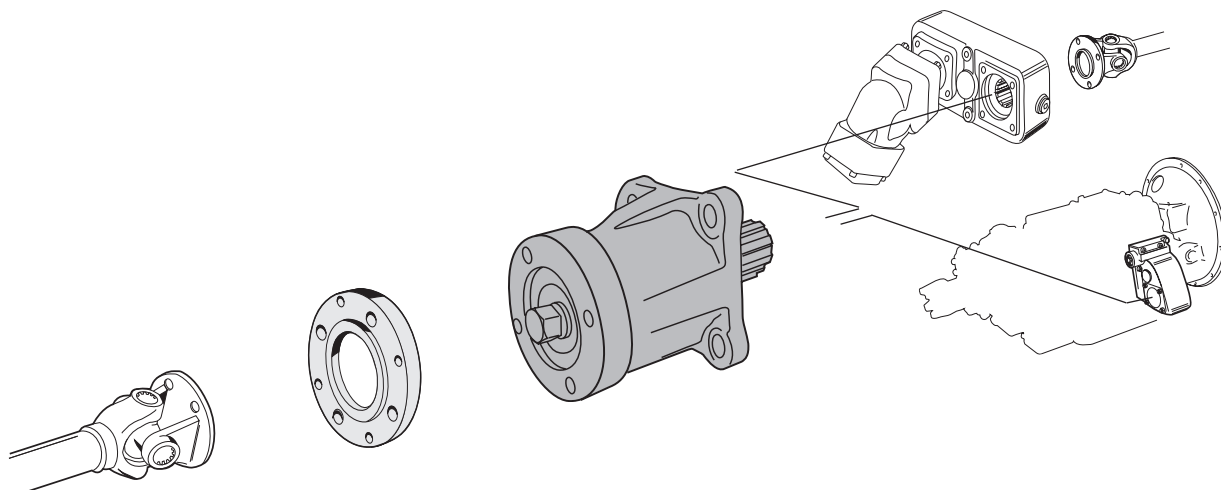

Pump 12	Spicer 1100 (B1)	—	61040	DIN 5462 (ZF)
	Spicer 1300 (B2)	—	61015	
	Spicer 1400 (B3)	—	61017	
	DIN 4-bolt DIN 4-Loch DIN 4-håls	11915	61040	
	DIN 6-bolt Ø 100 DIN 6-Loch DIN 6-håls	18236	61015	

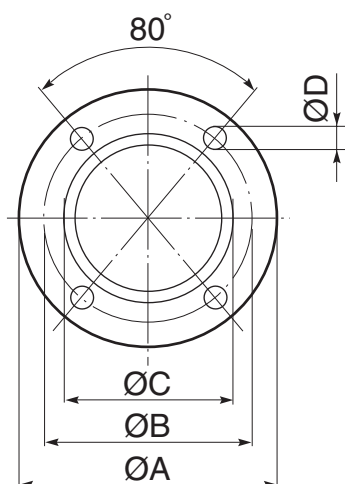

	A	B	C	D
	mm	mm	mm	mm
Spicer 1100 (B1)	88	69.9	57.2	8.5
Spicer 1300 (B2)	97	79.4	60.3	10.5
Spicer 1400 (B3)	115	95.3	69.9	10.5

Torque / Leistung / Moment *

Spicer 1100 (B1) 250 Nm

Spicer 1300 (B2) 500 Nm




Spicer 1400 (B3) 900 Nm

* Driveshaft / Swischenwelle / Mellanaxel



Special Adapter
Spezialadapter
Specialadapter

SCANIA

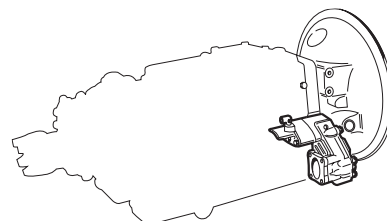



SAP-SCP-SAPT+By Pass
SLPD Savtec

61024

PTO ED 140

Special Adapter
Spezialadapter
Specialadapter

UNIMOG

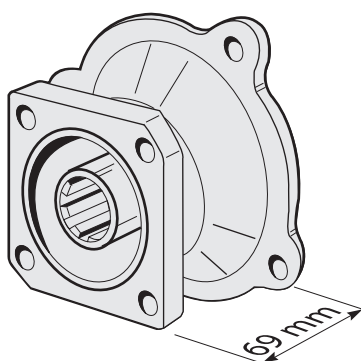

All
Alle DIN 5462 (ZF)
Alla


61012

PTO N16



Distance Adapter Kit
Abstandadapter-Bausatz
Distansadaptersats




DIN 5462

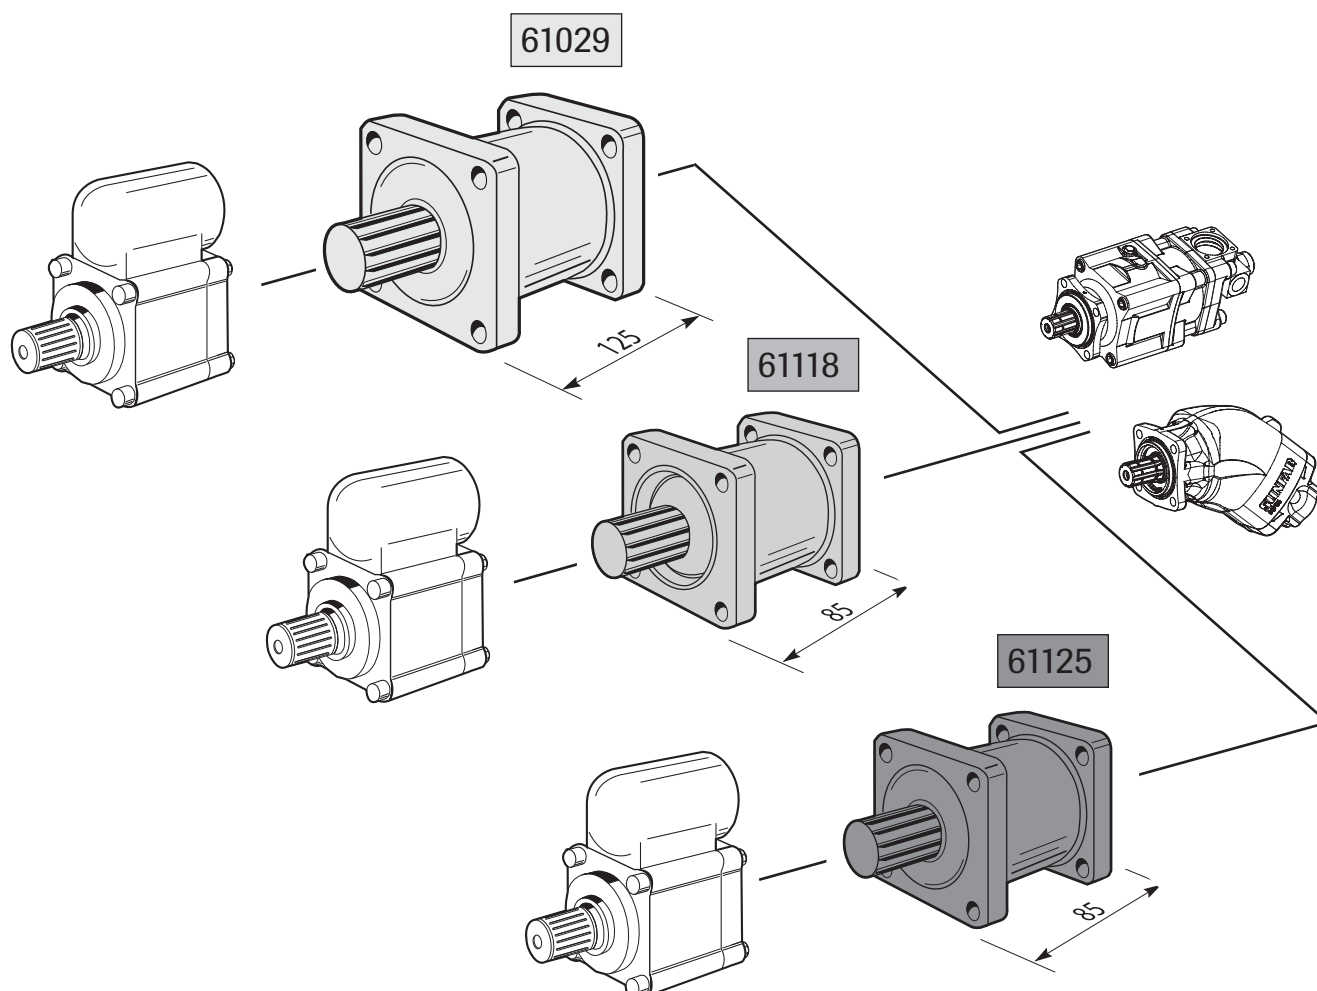

ZF PTO type / 1c, 2c, 3c	61029	Supported/Gelagert/Lagrad	All Alle DIN 5462 (ZF) Alla
ZF PTO type / 1a, 2a, 3a	61118	—	
ZF PTO type / 1a, 2a, 3a	61125	Supported/Gelagert/Lagrad	

Special Adapter
Spezialadapter
Specialadapter



6 - SP/1 3/8"

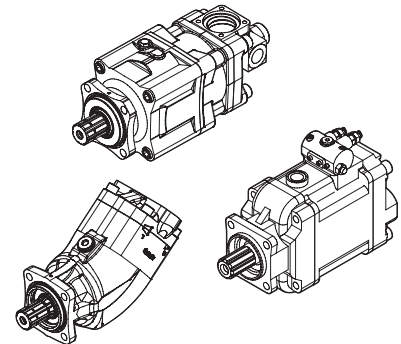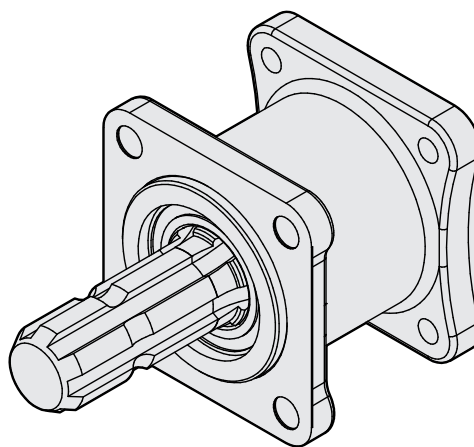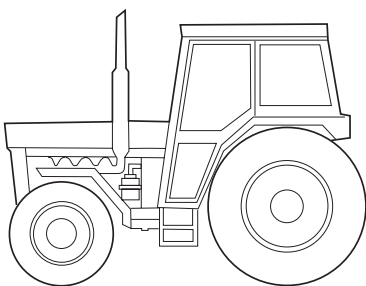

DIN 9611	61112	600Nm	All Alle DIN 5462 (ZF) Alla
----------	-------	-------	-----------------------------------

Adapter
Adapter
Adapter

SAE-B 13T



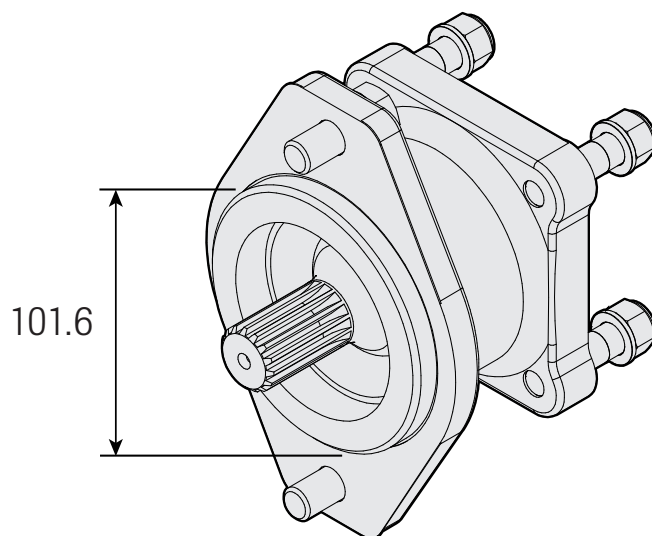


SAE-B 2	61058	300Nm	DIN 5462 (ZF)
---------	-------	-------	---------------



Adapter
Adapter
Adapter




SAE-B B 15T

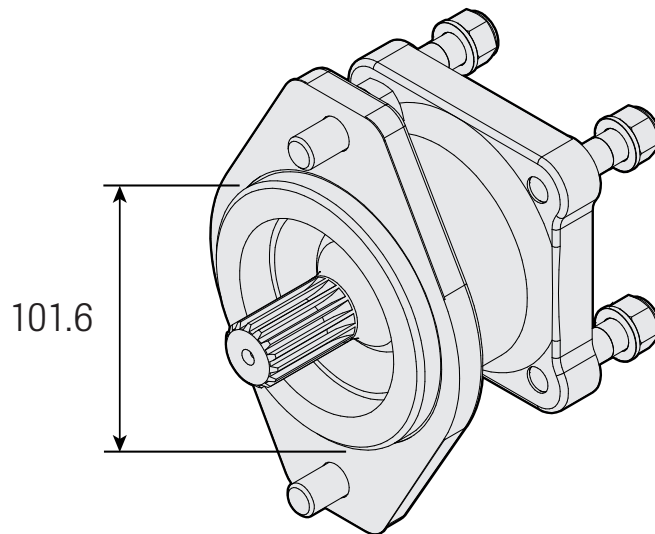

SAE-B 2	61055	450Nm	DIN 5462 (ZF)
---------	-------	-------	---------------

Adapter
Adapter
Adapter

UNI 8953

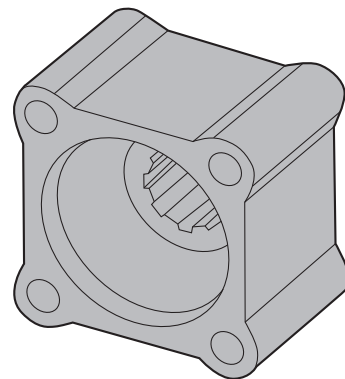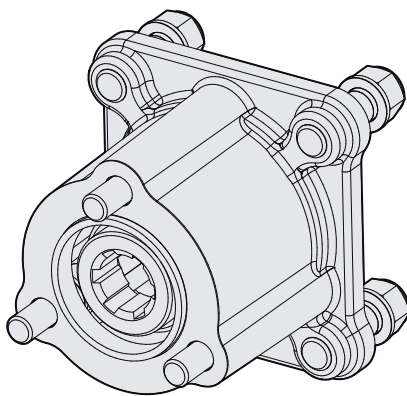


UNI 8953	61109	250 Nm	All Alle DIN 5462 (ZF) Alla
	60057	300 Nm	



In / disconnectable adapter

Rahmenhalterung

I/urkopplingsbar adapter



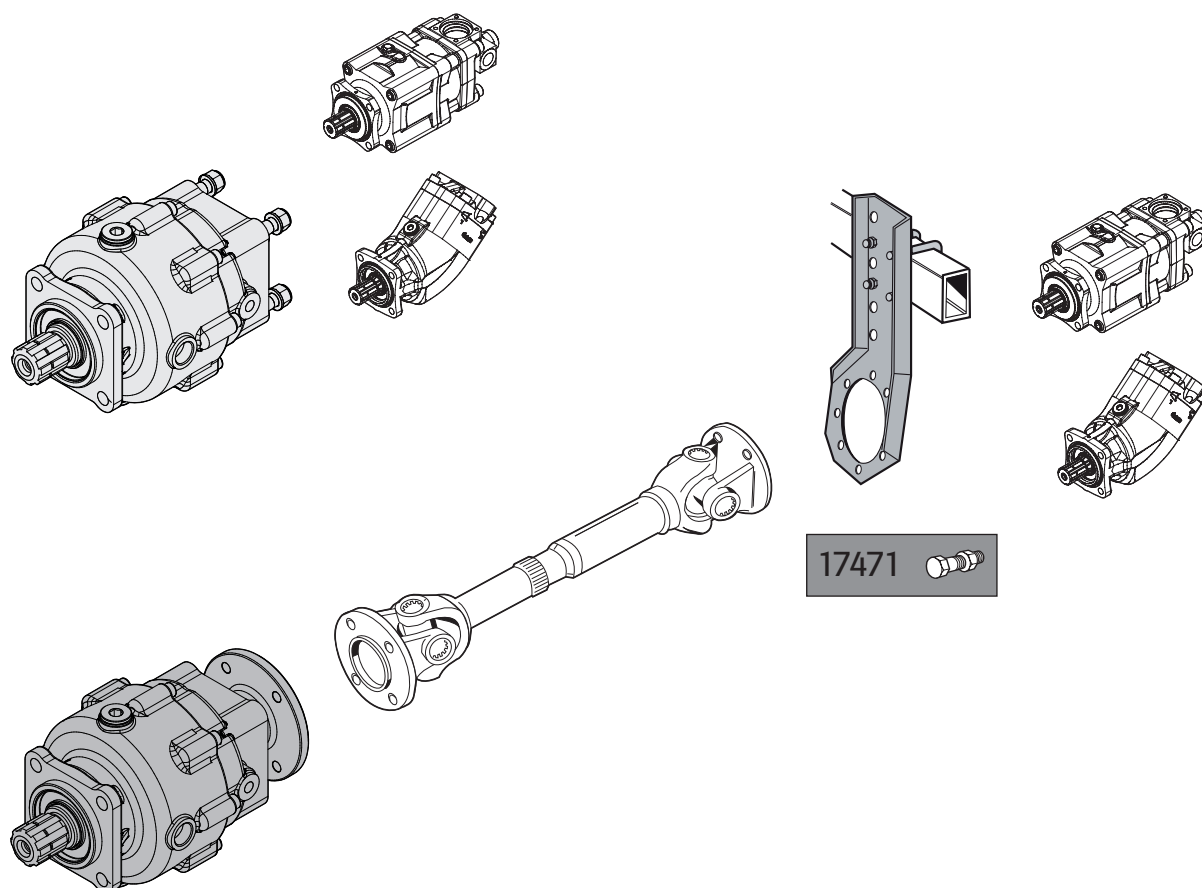


DIN 5462	61542	—	— 	DIN 5462
DIN 5462	—	61548	17471 	Flange spicer 1300 B2




Air pressure / Luftdruck / Lufttryck - kg/cm ²	5	6	7
Intermittent / Intermittierend / Intermittent - Nm	200	300	400



BY-PASS valve
BY-PASS ventil
BY-PASS ventil

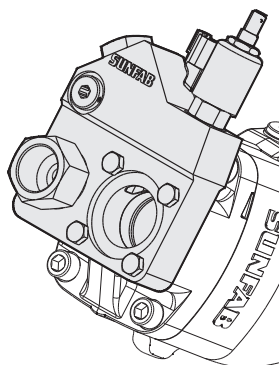

SAP, SCP 012-064	12V	91071	Engine-mounted power take off Am Motor montierter Nebenabtrieb Motormonterat kraftuttag
SAPT 090	24V	91073	
SAP, SCP 084-108	12V	91075	
SAPT 130	24V	91077	
Cable 2.5m - Deutsch connector		91078	

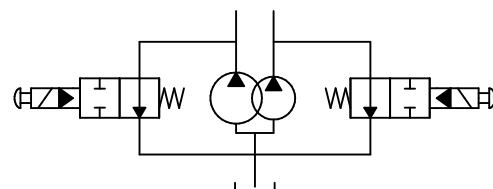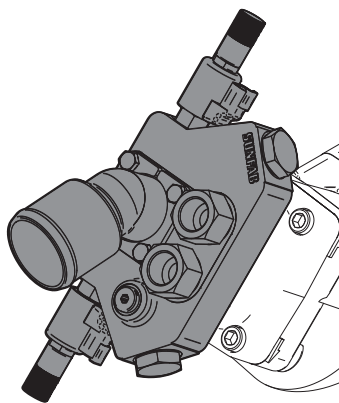

SCPD-56/26	12V	—	Engine-mounted power take off Am Motor montierter Nebenabtrieb Motormonterat kraftuttag
	24V	20536	
SCPD-70/36	12V	91171	
	24V	91170	
Cable 2.5m - Deutsch connector		91078	


For detailed information,
see separate Datasheet on
our [website](#).

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).



Pressure relief valve
Druckbegrenzungsventil
Tryckbegränsningsventil

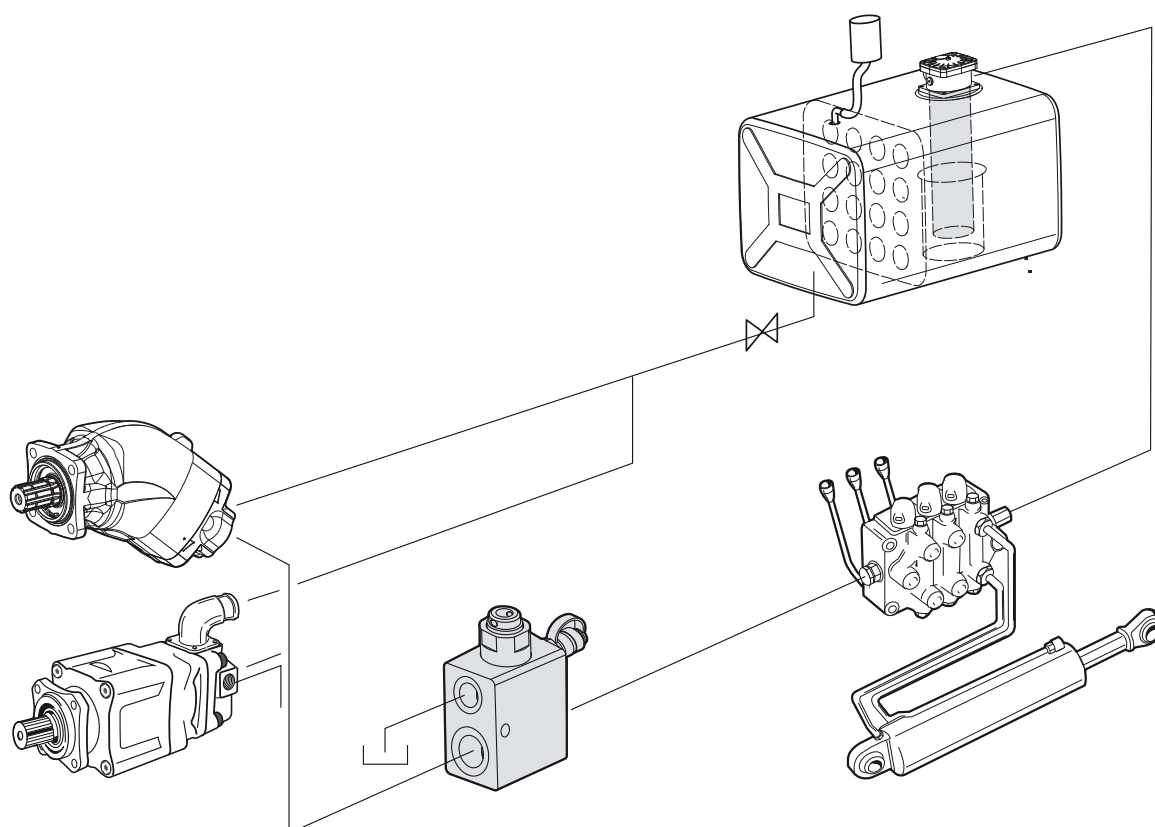

All pumps Alle Pumpen Alla pumpar	90086 G3/4" 32 Mpa 90087 G1" 32 Mpa 90076 G3/4" 42 Mpa 90029 G1" 42 Mpa	Equipment Ausrüstung Utrustning
--	--	--



For detailed information,
see separate Datasheet on
our [website](#).

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).

3435GB-DE-SE1506 Rev 1.0

Directional valve 3/2
Wegeventil 3/2
Rikningsventil 3/2

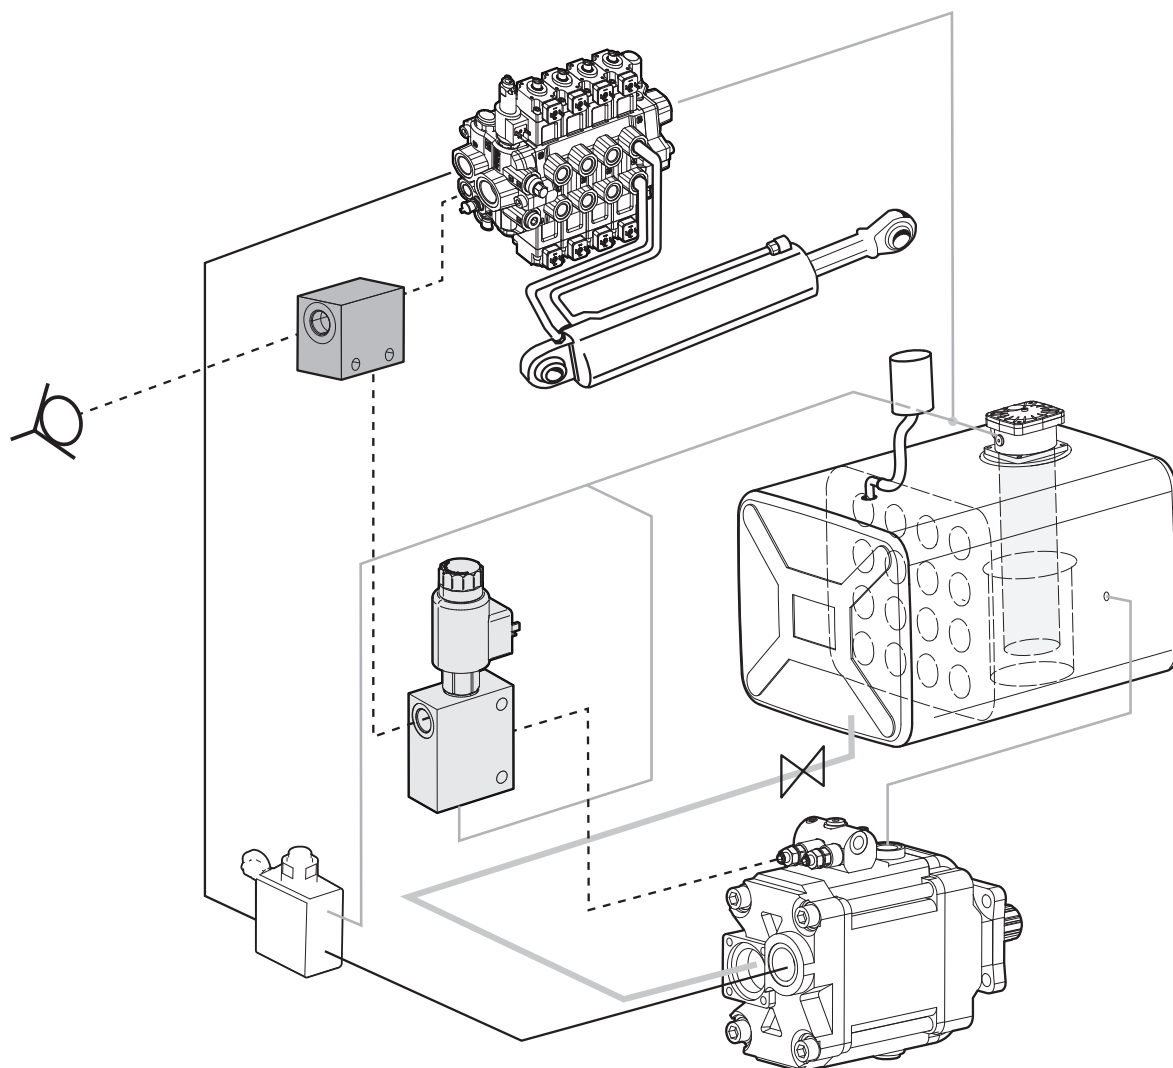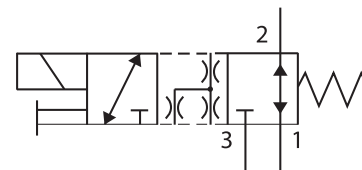

SVH	50922 (12V) 50863 (24V)	Equipment Ausrüstung Utrustning
-----	----------------------------	---------------------------------------

For detailed information,
see separate Datasheet on
our [website](#).


Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).

High Pressure Filter LS
Hochdruckfilter LS
Högtrycksfilter LS





92287

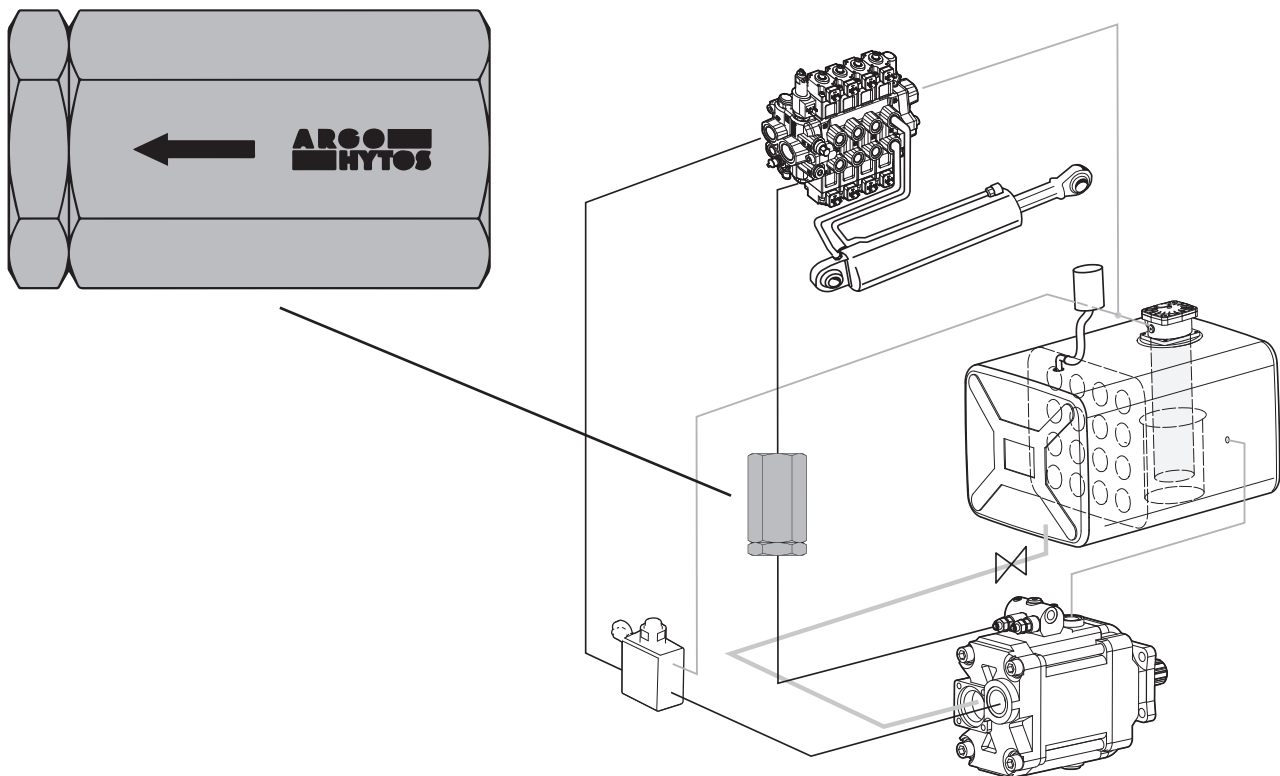

		l/min	Max pressure Max druck Max tryck	L	Degree of filtration Abscheidungsgrade Filtreringsgrad	Connections Anschlüssen Anslutningar
SVH	92287	7	500 bar	72 mm	10 µm	G 1/4"





Shuttle valve
Wechselventil
Skyttelventil

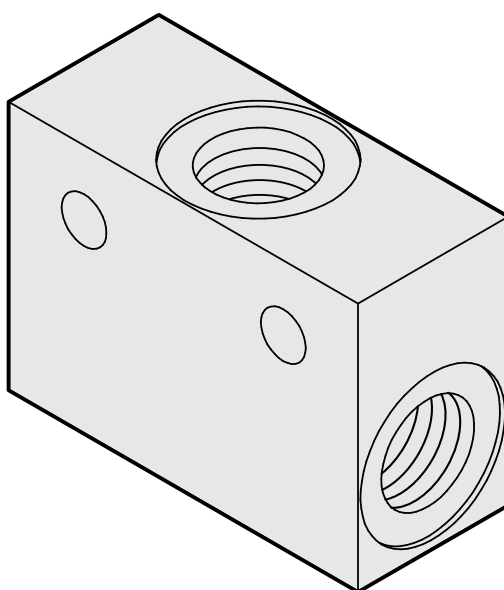

					Max pressure Max druck Max tryck	Equipment Ausrüstung Utrustning
l/min						
SVH	91115	Female/Female	¼ G	1 - 20	700 bar	
	91116	Female/Female	½ G	10 - 60	700 bar	



Anti-Cavitation Valve Nachsaugventil Anti-kavitationsventil

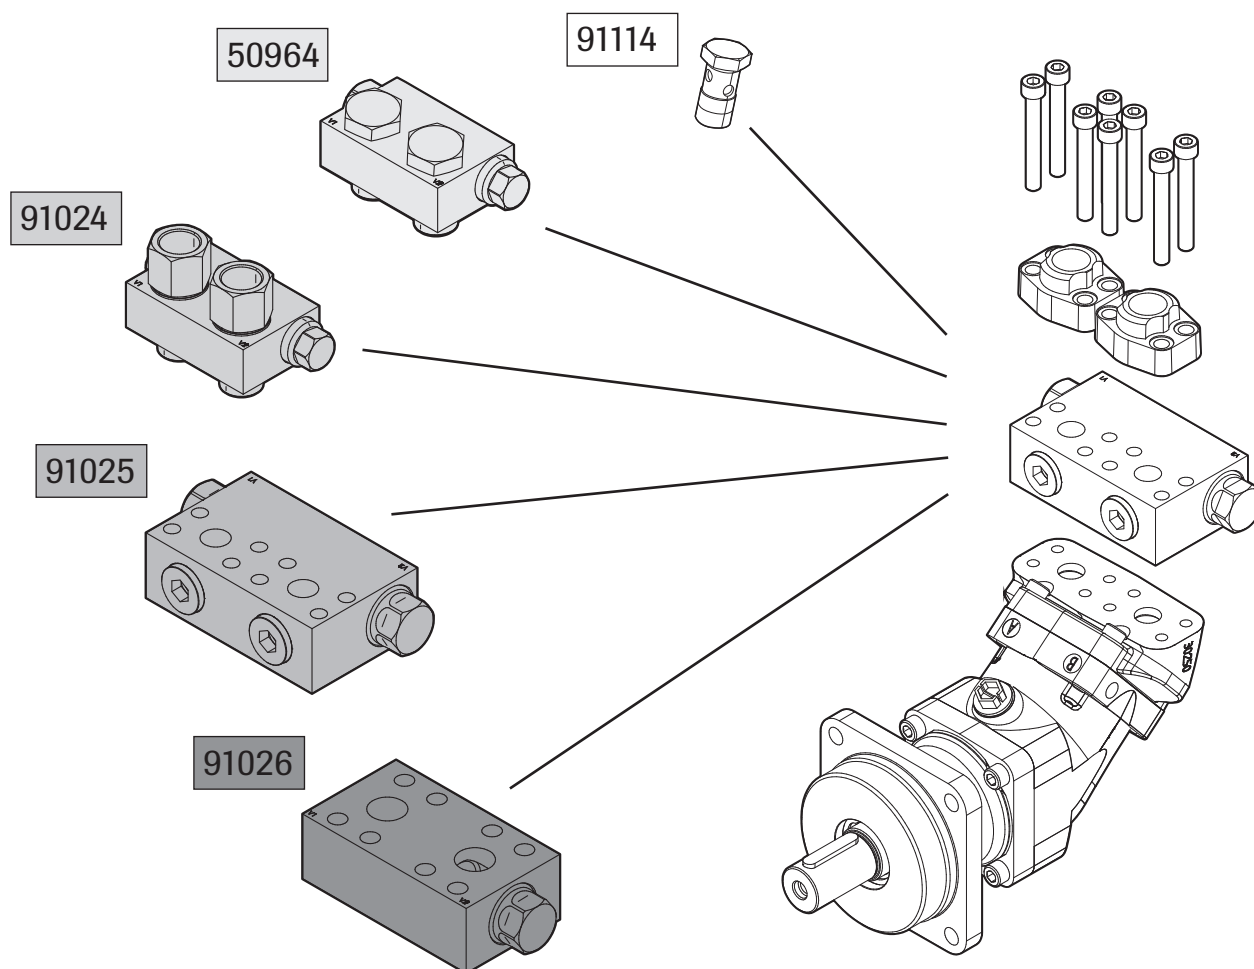

SCM	010-034	010-034	040-064	084-130
Valve/Ventil/Ventil	50964	91024	91025	91026
Flange/Flanche/Fläns	—	—	50857	50858
Bolt kit/Schraubensatz/Bultsats	—	—	50854	50855
Banjo bolt/Hohlschraube/Banjobult	91114	91114	G3/4	G1"
Cover/Deckel/Lock		K3G	V2/S2	V1

For detailed information, see
separate Datasheet on our [website](#).


Ausführliche Beschreibung: Siehe
Datenblatt auf unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).




Flushing Valve Spülventil Spolventil




91019-170



91020-190



91021-210

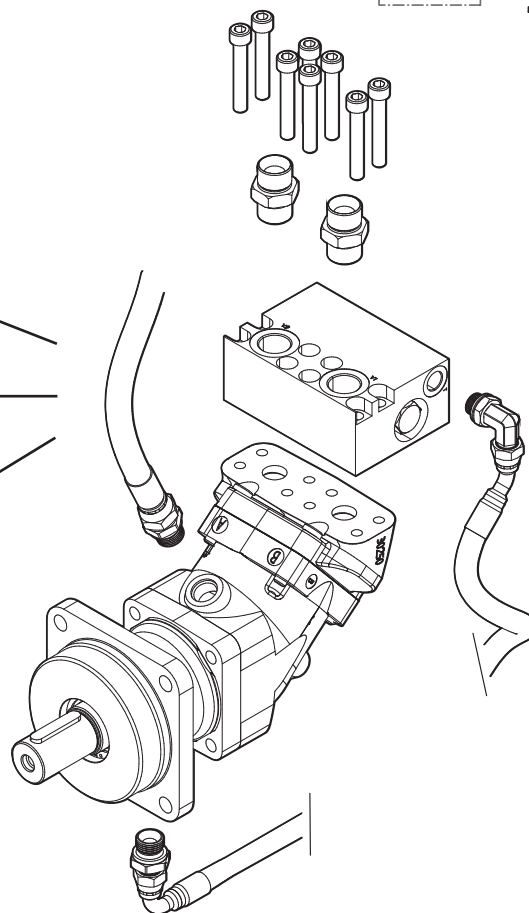

SCM	025-034			040-064		084-130		
Valve/Ventil/Ventil	91019-170			91020-190		91021-210		
Bolt kit/Schraubensatz/Bultsats	50851			50852		50853		
Hose kit/Schlauchsatz/Slangsats	M2	ISO	SAE	M2/ISO	SAE	M2/ISO	SAE-C	SAE-D
Pos 1*	50847	50848	50949	50848	50949	50848	50949	50949
Pos 2*	50847	50848	50948	50849	50950	50850	50950	50952
Cover/Deckel/Lock	V2			V2		V2		


*For detailed information,
see separate Datasheet on
our [website](#).

*Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

*För detaljerad information se separat
datablad på vår [hemsida](#).

3438GB-DE-SE1604 Rev 1.2

Injector
Injektoren
Injektor

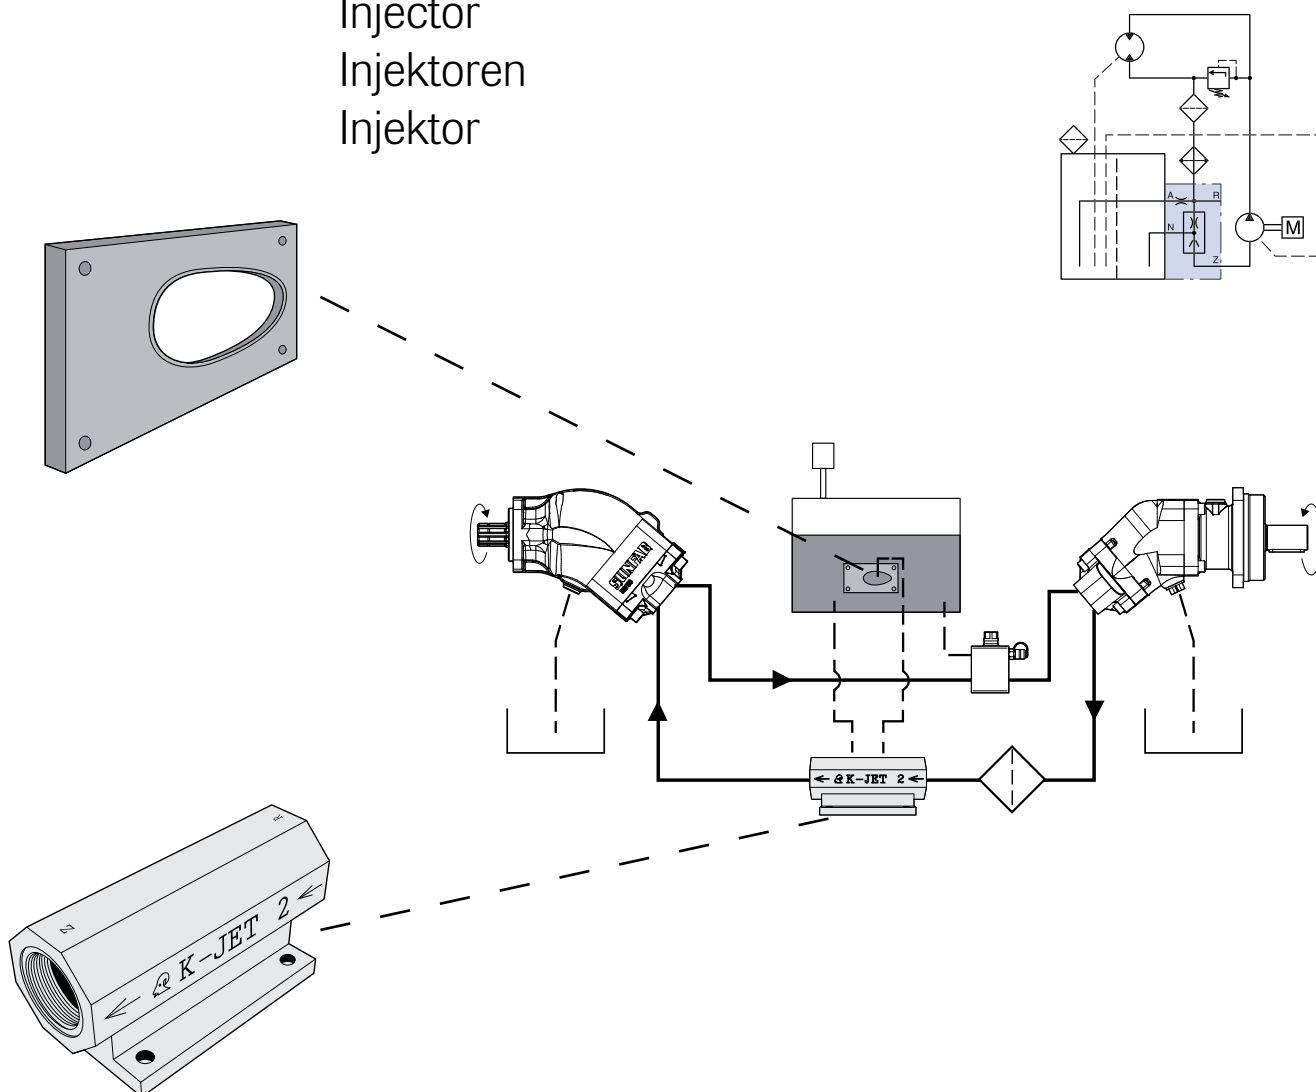



L/min-max				
SCM	Injector K-Jet 2/160	91926	60-160	SAP/SCP/SCP ISO
	Injector K-Jet 2/270	91927	100-270	
	Injector K-Jet 2/350	91928	140-380	
	Connection plate Anschlussplatte Anslutningsplatta	91929		Equipment Ausrüstung Utrustning

For detailed information,
see separate Datasheet on
our [website](#).



Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).

Speed Sensor Drehzahlsensor Varvtalsgivare

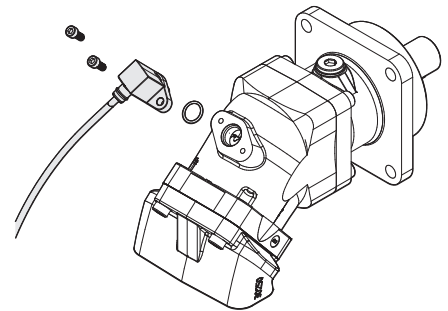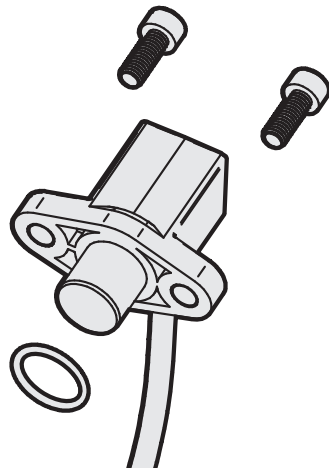

SCM	92133	PNP	Multi-operation system Mehrfunktionssystem Flerfunktionssystem
	92134	NPN	

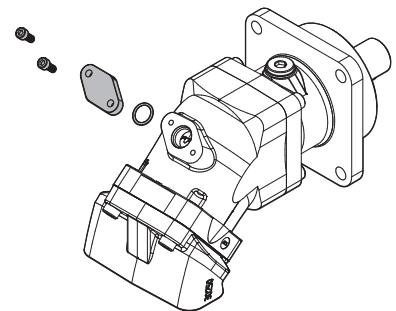

SCM	50865	–	Plug / Plug / Plugg
-----	-------	---	---------------------



For detailed information,
see separate Datasheet on
our [website](#).

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).



Gaskets Dichtungen Packningar

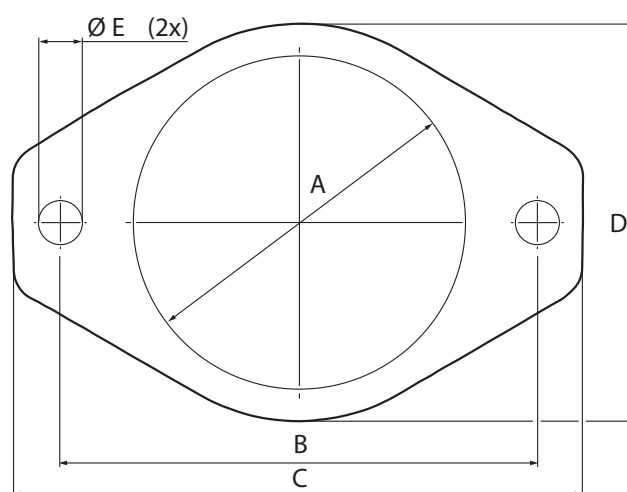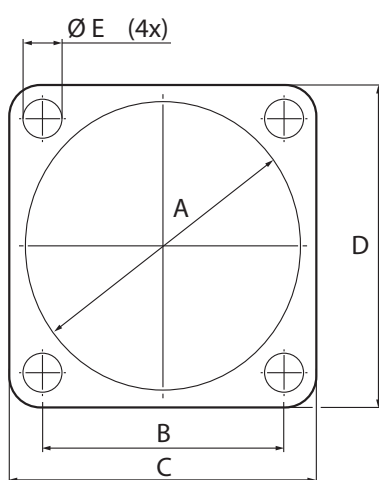


		ØA	B	C	D	ØE
		mm	mm	mm	mm	mm
DIN 4	61077	81	80	106	106	13
SAE-B 4	18244	102	146	114	144	13
SAE-B 2	61178	102	146	175	122	14
SAE-C 4	61177	128	114,5	145,5	114,5	14

3441GB-DE-SE1506 Rev 1.0



Stud kit Stiftschrauben Satz Pinnbultsats

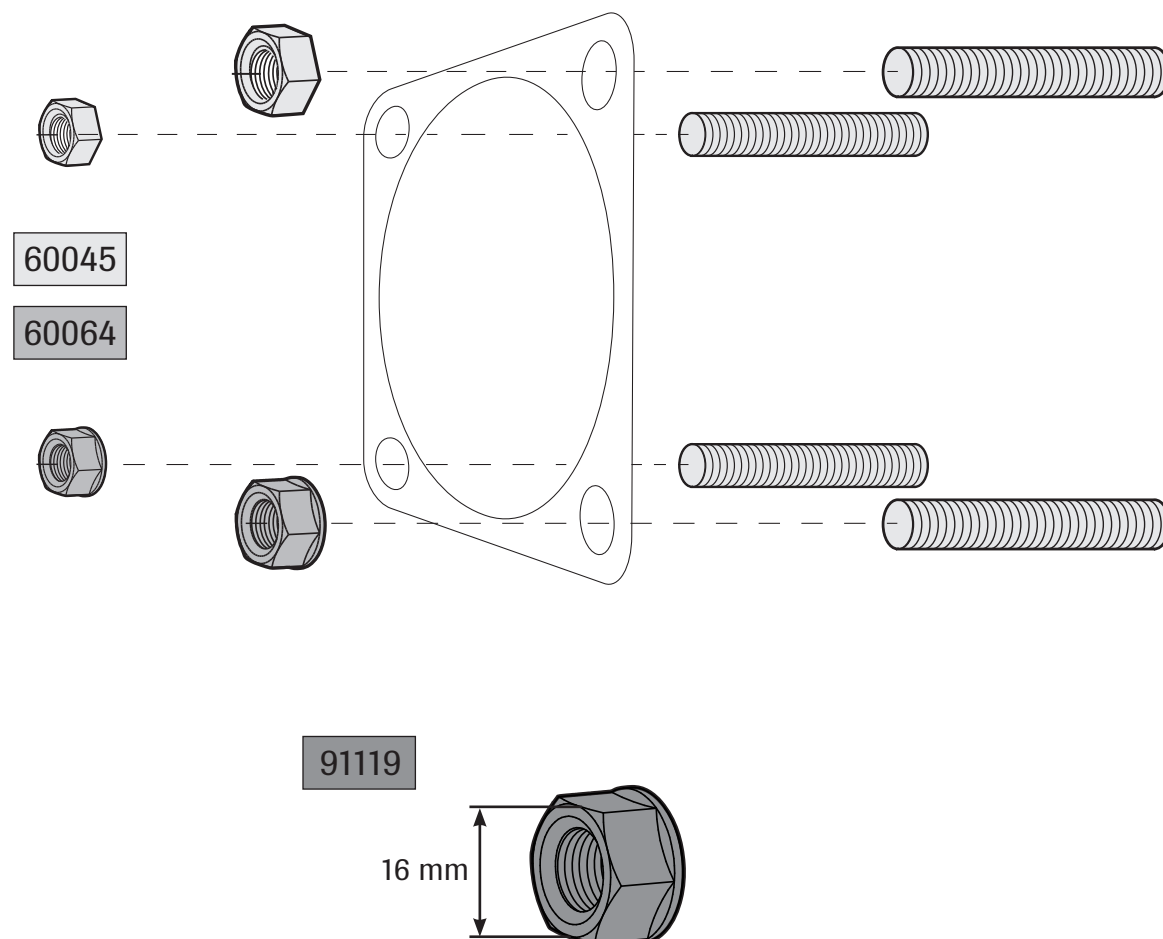






DIN 4 (80x80 mm)	60045	M12x49 (NV19)
	60064	M12x49 Ø 17 (NV16)
—	91119	M12-10-NV16-FZB



Diode Gate

Dioden-Torschaltung


Diodgrind

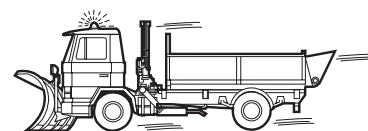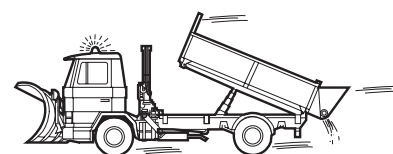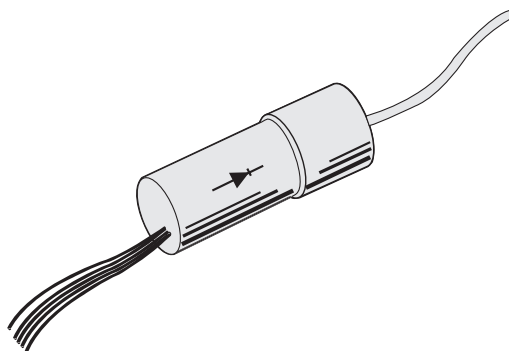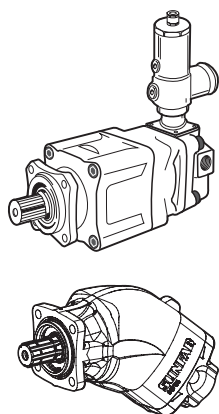

SLPD 20/20-64/32 Savtec
SAP, SCP, SAPT+By Pass

91362

Multi-operation system
Mehrfunktionssystem
Flerfunktionssystem

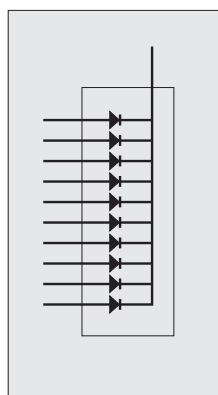

For detailed information,
see separate Datasheet on
our [website](#).

Ausführliche Beschreibung:
Siehe Datenblatt auf
unserer [Website](#).

För detaljerad information se separat
datablad på vår [hemsida](#).

[illegible]

[illegible]

[illegible]



Head office
Sunfab Hydraulics AB
Box 1094
Street address: Varvsgatan 2 - 4
SE-824 12 Hudiksvall, Sweden

E-mail: sunfab@sunfab.se
Tel: +46 650 367 00
Fax: +46 650 367 27

www.sunfab.com



Please contact Sunfab for detailed information and maintenance instructions.
Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.

Copyright © by Sunfab Hydraulics AB. All rights reserved.